


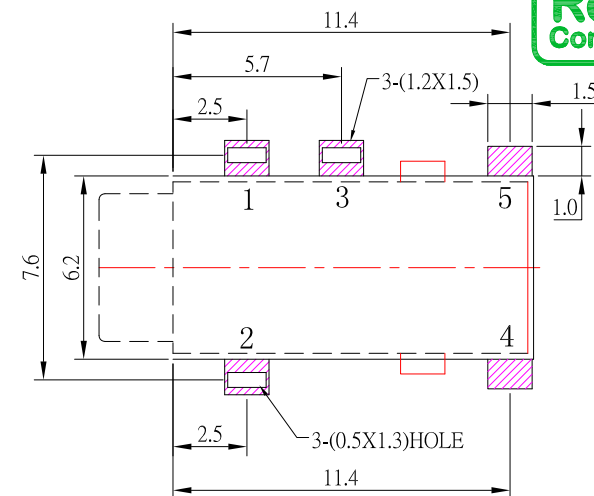
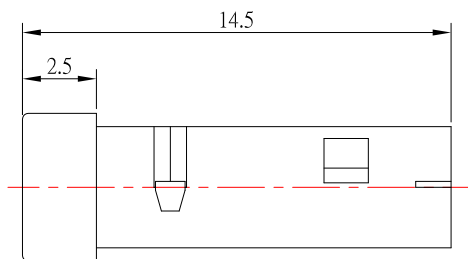
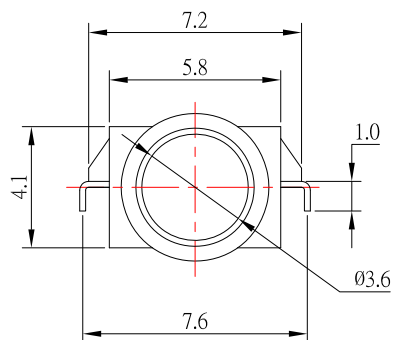


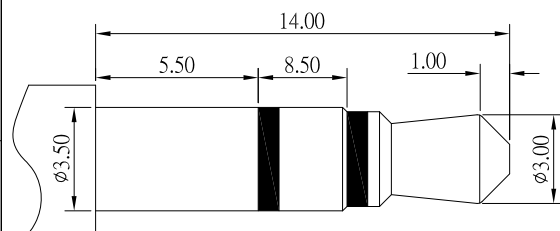

P.C.B LAYOUT
TOP VIEW



3.5mm 3 POLE PLUG

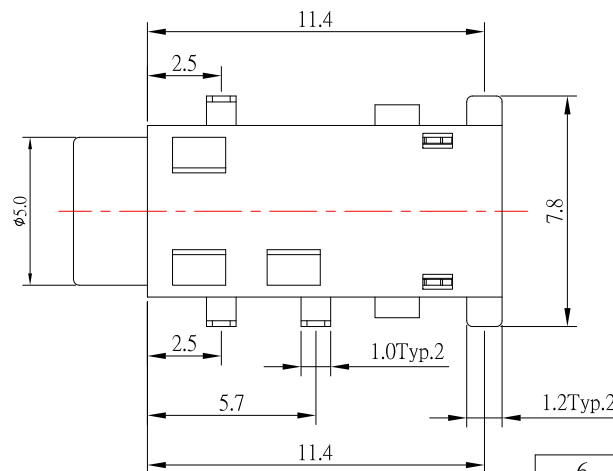

SPECIFICATION

- Rating: DC 30V 0.5A ;
- Contact resistance: $\leq 30m\Omega$;
- Insulation resistance: $\geq 100M\Omega$;
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3-20N;
- life test: 5,000 cycles °

6	HOUSING	1	PA9T	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY: Jack Lu		DATE: 04/12/17	MAT'L:	TITLE: JACK
CHECKED BY: Jacky Chen		DATE: 04/12/17	FINISH:	MODLE: 3.5mm PHONE JACK 端子腳鍍金
APPROVED BY: Tony Kao		DATE: 04/12/17	SCALE: 1 : 1	DWG NO. PJ-5055D-S124
			SHEET NO. 1 of 1	PART NO. PJ-5055D-S124
				SIZE: A4
				VER: R1

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
		Above 5 ~ 15 ±0.3			
		Above 15 ~ 30 ±0.4			
		Above 30 ~ 50 ±0.5			
		Angle ±0.3°			

1	更新外型樣式	Jack	041217
ITEM NO.	DESCRIPTION	DRAWN	DATE