

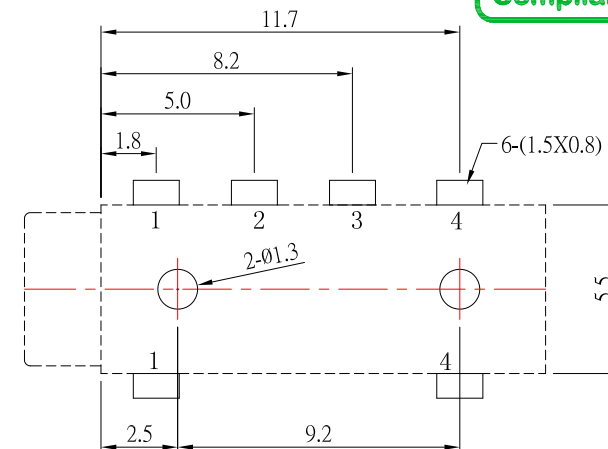
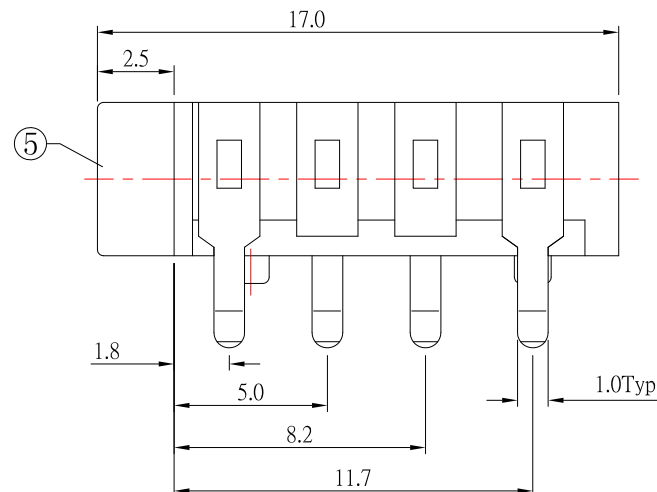
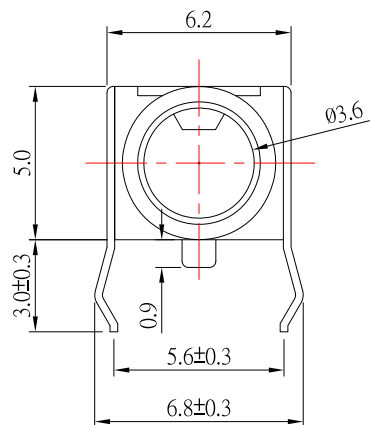



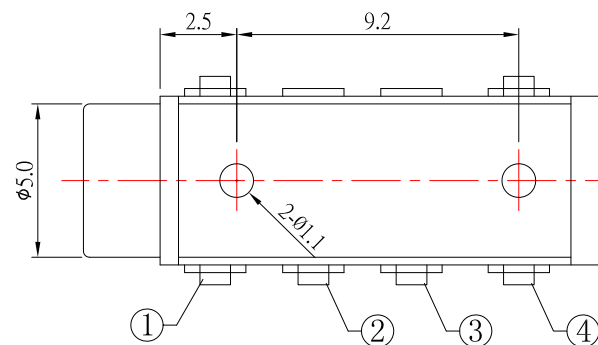

P.C.B LAYOUT
TOP VIEW

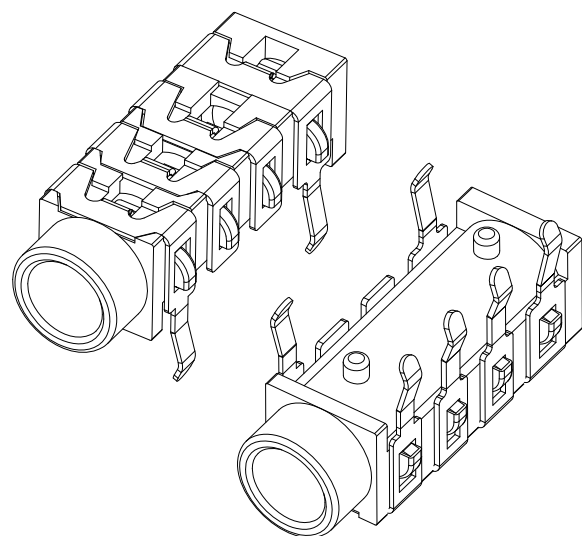

SCHEMATIC

SPECIFICATION

- 1.Rating : DC 30V 1.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

5	HOUSING	1	PBT	
4	CONTACT FOOT	1	SUS301	Sn-Plating
3	CONTACT FOOT	1	SUS301	Sn-Plating
2	CONTACT FOOT	1	SUS301	Sn-Plating
1	CONTACT FOOT	1	SUS301	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/26/14	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-D3013B-S125
Jacky Chen	06/26/14	1 : 1	PART NO.	PJ-D3013B-S125
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	06/26/14			

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------

SIZE
A4
VER
R