
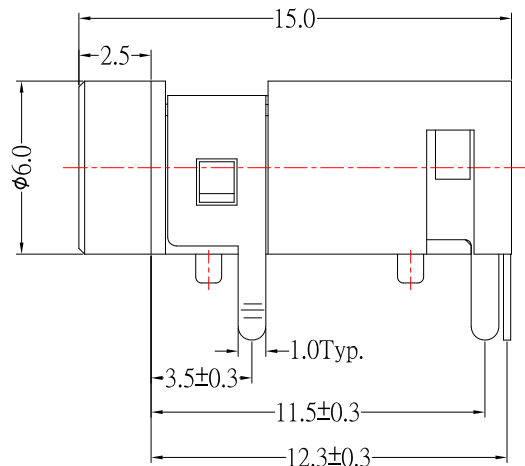
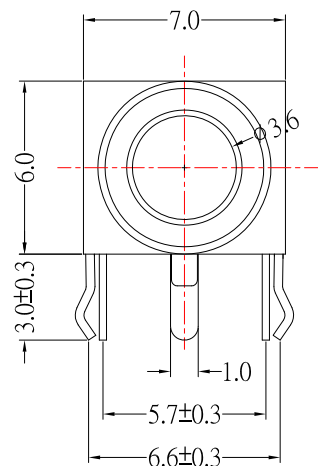



MODEL NO.	PJ-D3022-S124
SCHEMATIC	

SPECIFICATION

- Rating : DC 30V , 1.0A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N
- life test : 10,000 cycles °

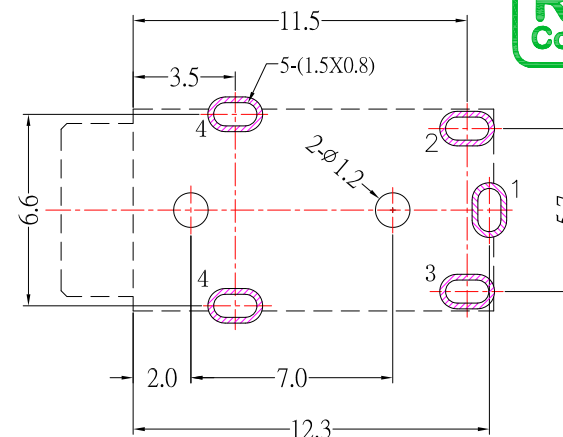

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

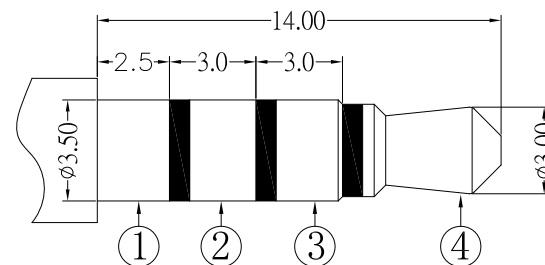

φ3.50mm 4 POLE PLUG



CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

5	HOUSING	1	PBT	
4	CONTACT FOOT #4	1	Phosphor Bronze	Sn-Plating
3	CONTACT FOOT #3	1	Brass	Sn-Plating
2	CONTACT FOOT #2	1	Phosphor Bronze	Sn-Plating
1	CONTACT FOOT #1	1	Phosphor Bronze	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/15/21	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-D3022-S124
Jacky Chen	10/15/21	1 : 1	PART NO.	PJ-D3022-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	10/15/21			