

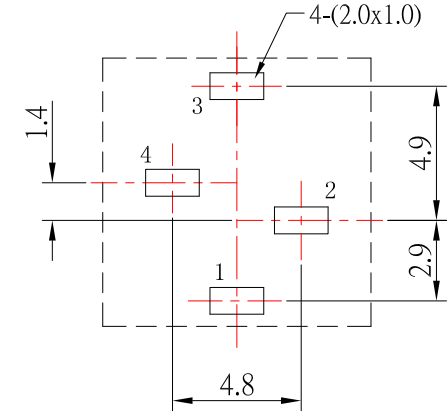
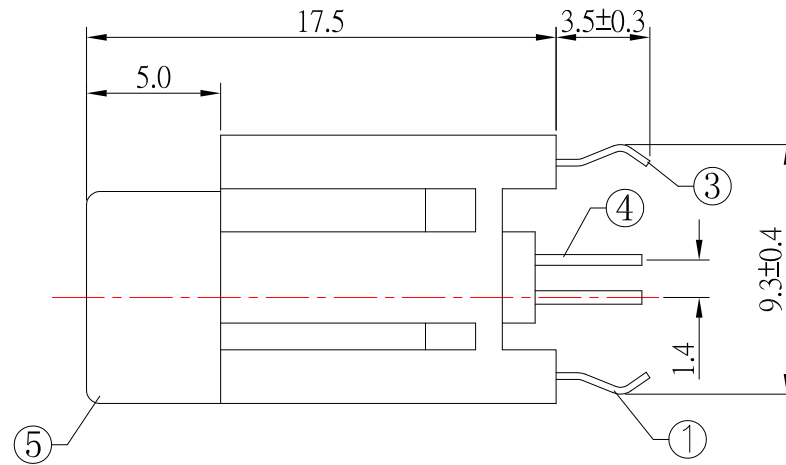


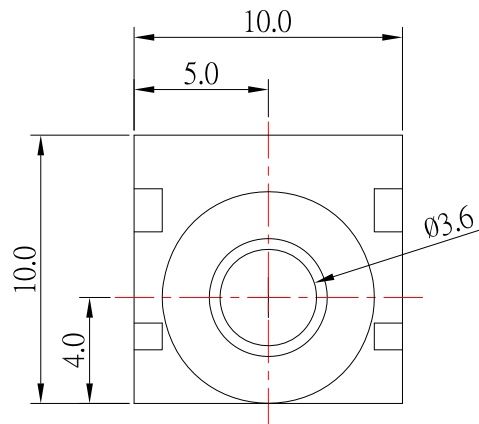

P.C.B LAYOUT
TOP VIEW



SCHEMATIC

PJ-D3042	PJ-D3042-1	PJ-D3042-2

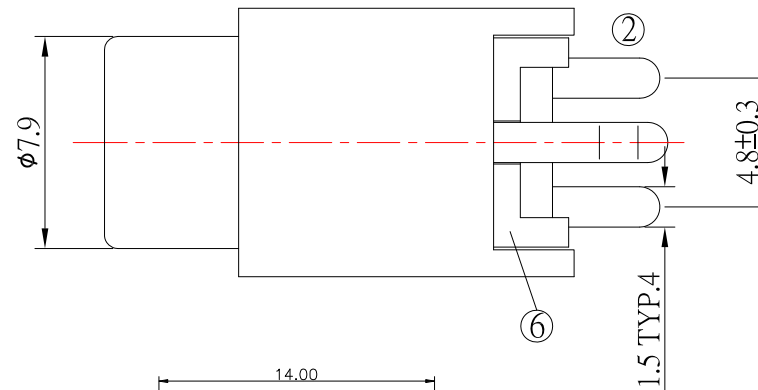

SPECIFICATION

- Rating : DC 30V 0.5A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N;
- life test : 5,000 cycles °

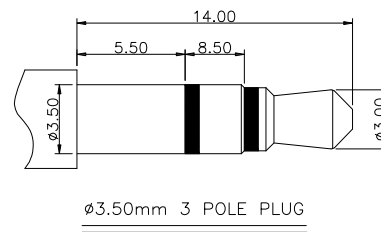

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	COVER	1	PBT	
5	HOUSING	1	PBT	
4	FLAT PIECE	1	BRASS	Ag-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	FLAT PIECE	1	BRASS	Ag-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5	Above 5 ~ 15	Above 15 ~ 30	Above 30 ~ 50	Angle
	±0.2	±0.3	±0.4	±0.5	±0.3°
3RD. ANGEL'S					
UNITS					
MM					

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	06/06/17			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	06/06/17			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-D3042-x-S124
Tony Kao	06/06/17	1 : 1		
SHEET NO.	1 of 1	PART NO.	PJ-D3042-x-S124	SIZE
				A4
				VER
				R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新尺寸	Jack	060617