


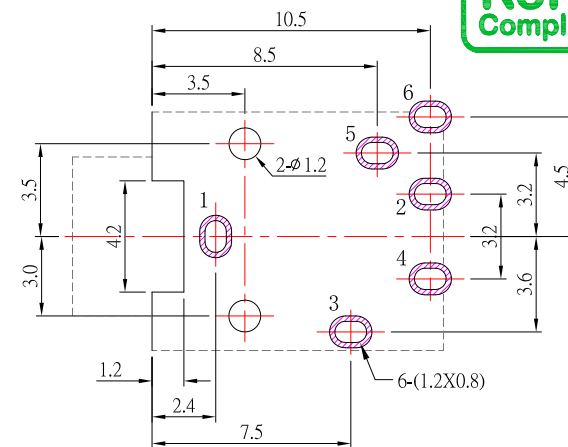
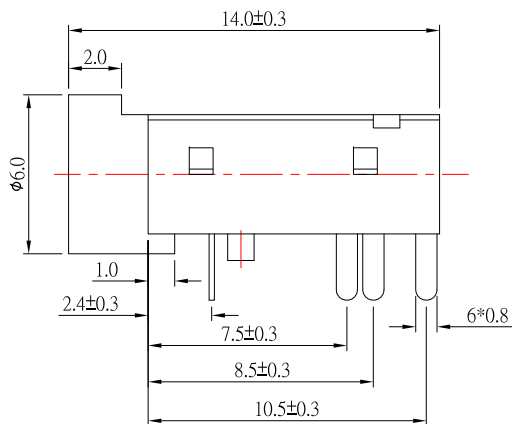


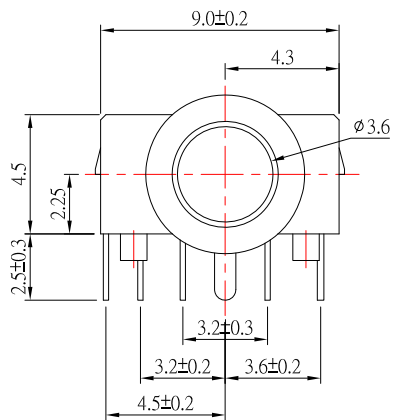

P.C.B LAYOUT
TOP VIEW

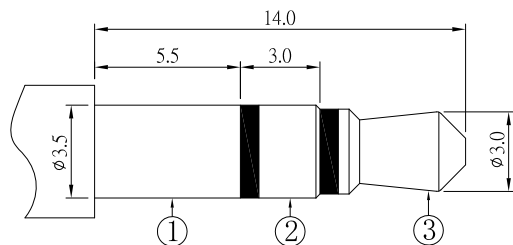


Ø3.50mm 3 POLE PLUG

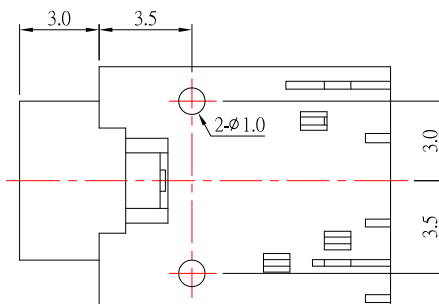

SCHEMATIC

PJ-D3053-S124



SPECIFICATION

- 1.Rating : DC 30V, 1.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 250VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

7	HOUSING	1	PBT	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
4	CURVE PIECE	1	PHOSPHOR BRONZE	Ag-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	04/25/24	FINISH	MODLE	PHONE JACK 常閉型 / 無外殼
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-D3053-S124
Jacky Chen	04/25/24	1 : 1	PART NO.	PJ-D3053-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	04/25/24			



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

2	更新圖面	Jack	042524
1	更新外型樣式	Jack	100719
ITEM NO.	DESCRIPTION	DRAWN	DATE