


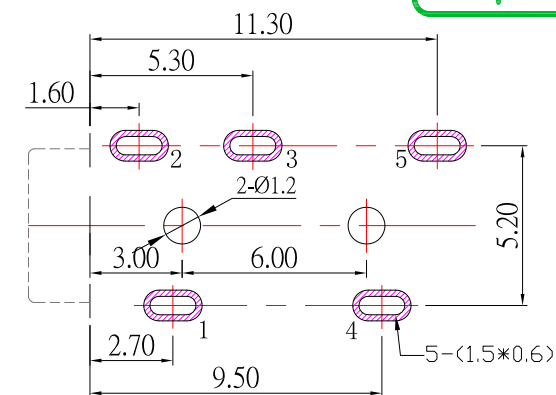
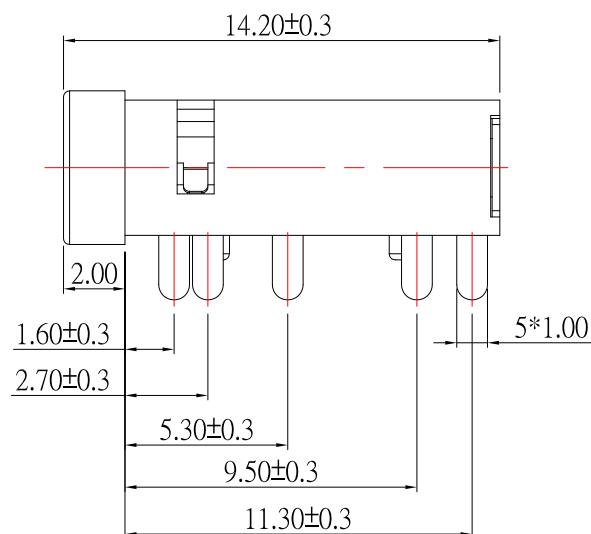


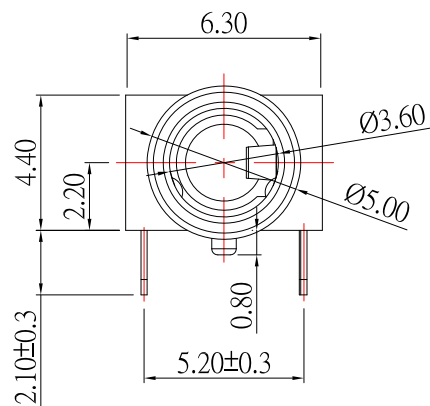

P.C.B LAYOUT
TOP VIEW

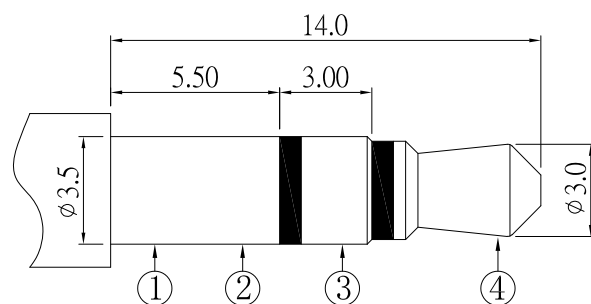


Ø3.50mm 3 POLE PLUG

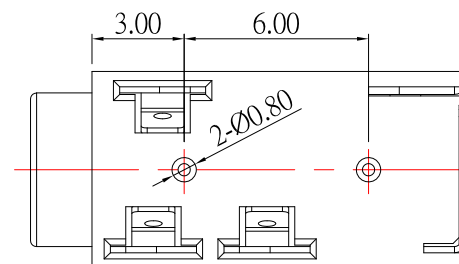

SPECIFICATION

- 1.Rating : DC 30V, 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

SCHEMATIC

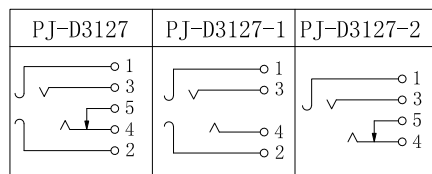

6	HOUSING	1	PA9T	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
No	PART NAME	QTY	MATERIAL	REMARK

3	更新圖面	Jack	062425
2	更新圖面	Jack	103122
1	更新為A0版	Jack	090117
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/24/25			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	06/24/25			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-D3127-x-S124
Tony Kao	06/24/25	1 : 1		
		SHEET NO.	1 of 1	PART NO. PJ-D3127-x-S124
				SIZE A4
				VER R3