


- SPECIFICATION**
- Rating : DC 30V , 1.0A
  - Contact resistance :  $\leq 30m\Omega$
  - Insulation resistance :  $\geq 100M\Omega$
  - Withstand voltage : 500VAC
  - Insertion and extraction force : 5-30N
  - life test : 5,000 cycles

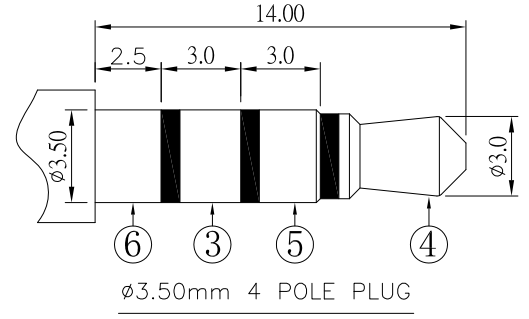

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑥	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
⑤	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
④	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
③	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
②	AXIS SUPPORT	1	BRASS	Ni-Plating
①	HOUSING	1	PBT	

**CONTACT** 建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/21/21			
CHECKED BY:	DATE	FINISH	MODLE	3.5 PHONE JACK 4 pole 攻牙 焊線式
Jacky Chen	10/21/21			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-D3223M-S124
Tony Kao	10/21/21	1 : 1	PART NO.	PJ-D3223M-S124
		SHEET NO.	1 of 1	SIZE A4
				VER R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新尺寸	Jack	102121
1	更新材質	Jack	102021