




P.C.B LAYOUT  
TOP VIEW

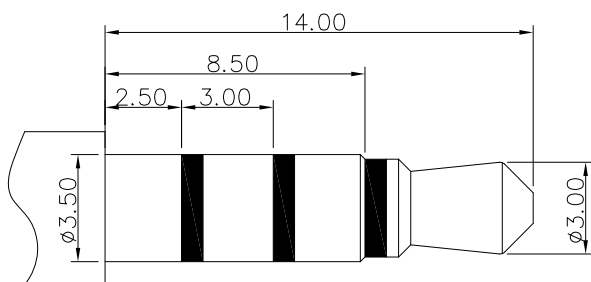

Ø3.50mm 4 POLE PLUG

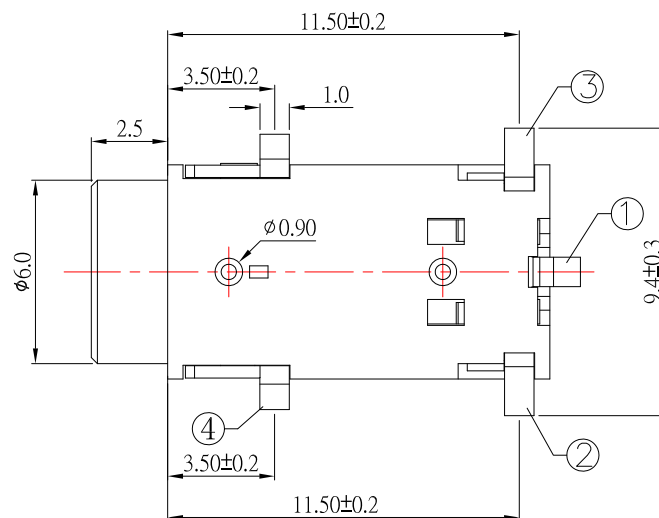

SCHEMATIC



SPECIFICATIONS

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance :  $\leq 30m\Omega$
- 3.Insulation resistance :  $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

5	HOUSING	1	PA9T	
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

**CONTACT**

建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	03/29/19			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	03/29/19			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3022-S124
Tony Kao	03/29/19	1 : 1		
		SHEET NO.	PART NO.	PJ-S3022-S124
		1 of 1		
				SIZE A4
				VER R1

1	更新樣式及尺寸	Jack	032919
ITEM NO.	DESCRIPTION	DRAWN	DATE