


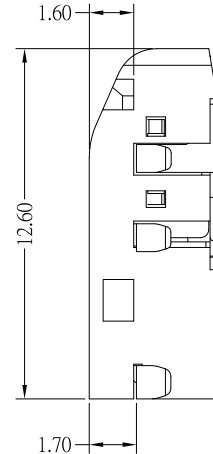
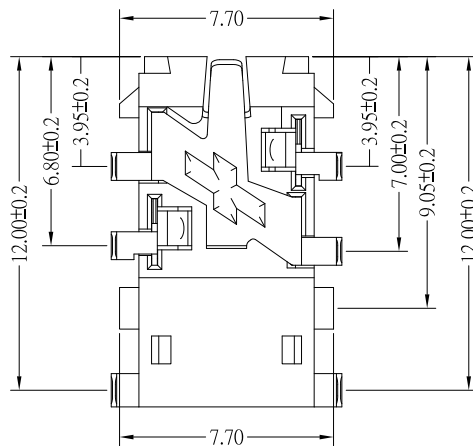
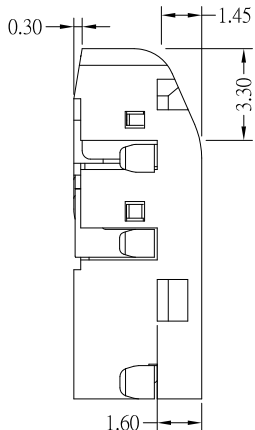


P.C.B LAYOUT
TOP VIEW



SPECIFICATIONS

- Rating : DC 30V , 0.5A
- Contact resistance : $\leq 30m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles

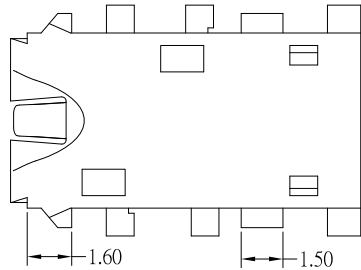

6	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	HOUSING	1	PPA (Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/25/23			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	04/25/23			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S32304A-S457
Tony Kao	04/25/23	1 : 1		
		SHEET NO.	PART NO.	PJ-S32304A-S457
		1 of 1		
				SIZE A4
				VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE