

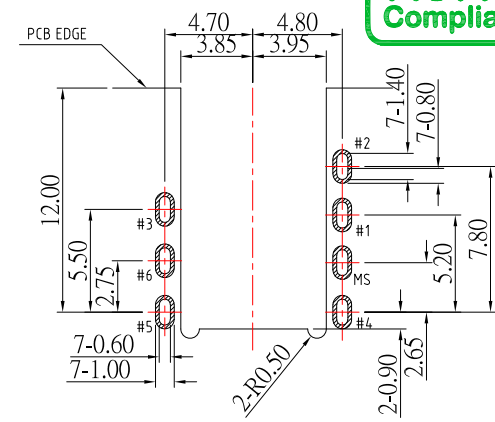

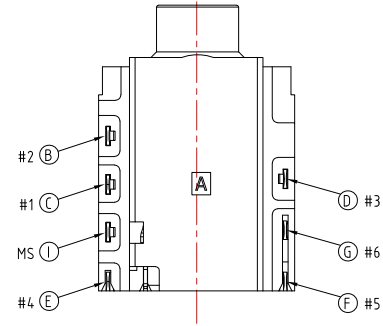
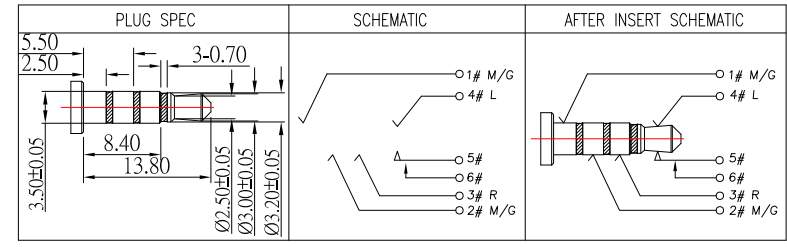
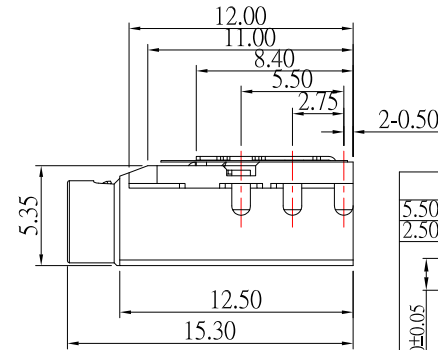


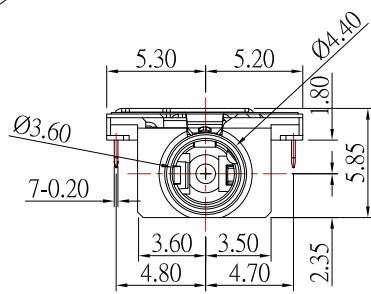

P.C.B LAYOUT
TOP VIEW

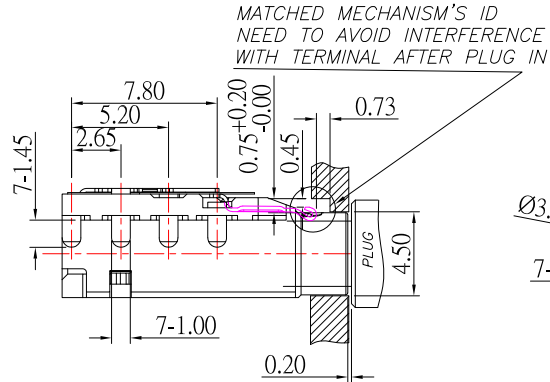

SPECIFICATION

- 1.Rating : 12V ; 0.5A ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 1000\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

(J)	MYLAR	1	KAPTON	YELLOW
(I)	SHELL	1	Stainless steel	Ni
(H)	SEPARATOR	1	PA10T	BLACK
(G)	MAKE TERNINAL	1	PHOSPHOR BRONZE	CONTACT AREA: GF SOLDER AREA: GF, Ni OVER ALL
(F)	TRANSFER TERMINAL	1	PHOSPHOR BRONZE	CONTACT AREA: GF SOLDER AREA: MATTE TIN Ni OVER ALL
(E)	TIP SPRING	1	PHOSPHOR BRONZE	
(D)	RING A	1	PHOSPHOR BRONZE	
(C)	EARTH	1	PHOSPHOR BRONZE	
(B)	RING B	1	PHOSPHOR BRONZE	
(A)	BODY	1	PA10T	BLACK
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/19/25	FINISH	MODLE	PHONE JACK 4段1開關段 沉板板下 CH1.8
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-S32309E-S457
Jacky Chen	05/19/25	1 : 1	PART NO.	PJ-S32309E-S457
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	05/19/25			