

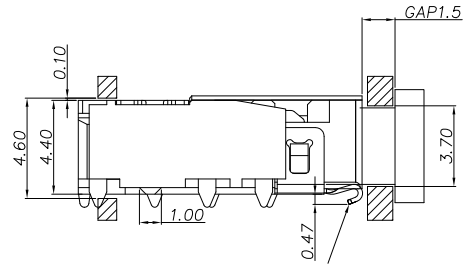
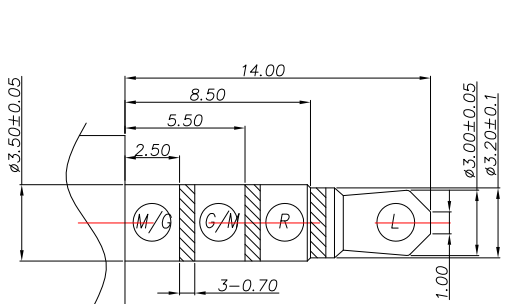



P.C.B LAYOUT
TOP VIEW

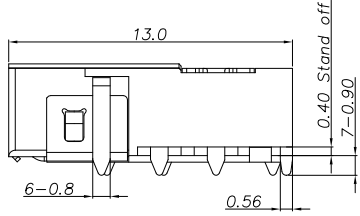

MATCHED MECHANISM'S TO NEED TO
AVOID INTERFERENCE
WITH TERMINAL AFTER PLUG IN

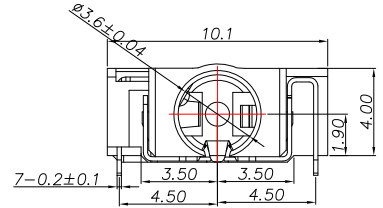

RECOMMENDED PLUG(TOL,±0.05)
Ø3.5 4-POLE STANDARD PLUG

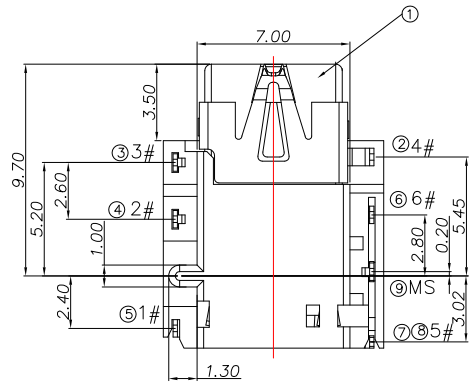

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - 1-1 RATING: 12V 1A
 - 1-2 CONTACT RESISTANCE: 50mΩ MAX. (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.3~3.0KGF .
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0KGF .
- DURABILITY TEST: 5,000 CYCLES .

ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY
⑨	SHELL	SUS	NI PLATED	1
⑧	SEPARATOR	PA9T(BLACK)		1
⑦	TRANSFER TERMINAL	C5210	AU ON CONTACT AREA AND SOLDER TAIL. ALLOVER NICKEL PLATED	1
⑥	MAKE TERMINAL	C5210		1
⑤	TIP SPRING	C5210		1
④	RING A	C5210		1
③	RING B	C5210		1
②	EARTH	C5210	NI PLATED	1
①	P1_HOUSING	PA9T(BLACK)		1

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 - 15 ±0.3
 Above 15 - 30 ±0.4
 Above 30 - 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/18/21			
CHECKED BY:	DATE	FINISH	MODLE	3.5mm PHONE JACK
Jacky Chen	06/18/21			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3507D-S214
Tony Kao	06/18/21	1 : 1		
		SHEET NO.	PART NO.	PJ-S3507D-S214
				SIZE A4
				VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE