
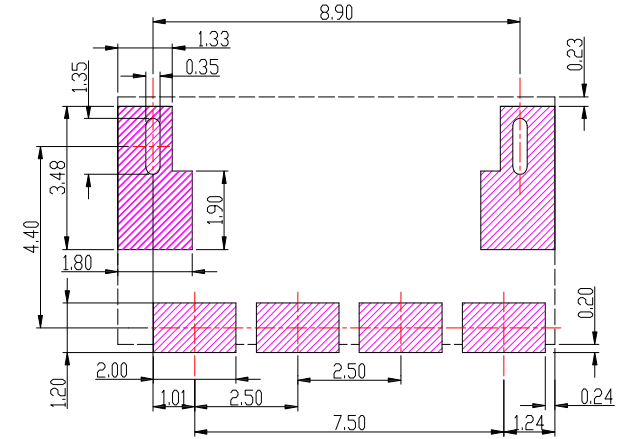
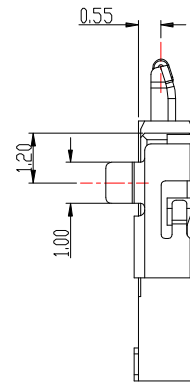
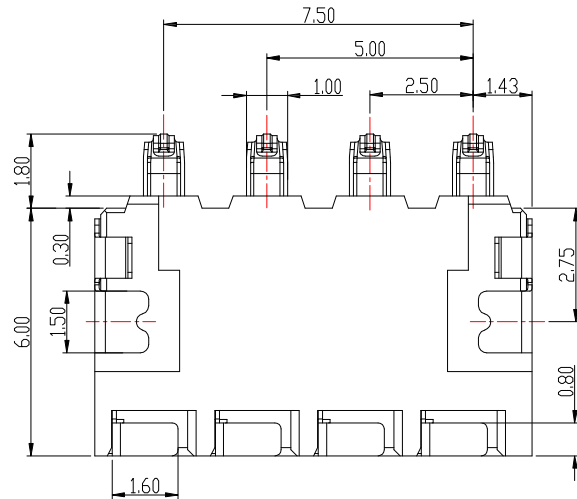


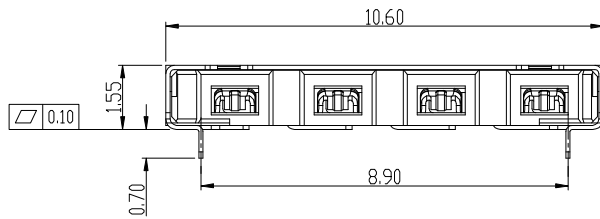

P.C.B LAYOUT

MATERIAL:

1. INSULATOR : HIGH-TEMP PLASTIC
2. CONTACT : COPPER ALLOY, GOLD PLATED OVER NICKEL
3. SHELL : SUS, NICKEL PLATED

SPECIFICATION:

1. RATING : 12V DC , 2.0A
2. CONTACT RESISTANCE : 50mΩ
3. DURABILITY: 3000 CYCLES
4. OPERATING TEMPERATURE : -30° C ~ 80° C

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.	DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR	
					Jack Lu	05/28/25	FINISH		MODLE	BATTERY CONNECTOR	
					CHECKED BY: DATE						
					Jacky Chen	05/28/25	SCALE	1 : 1	DWG NO.	BC-15G1S-04P-S486	SIZE
					APPROVED BY: DATE		SHEET NO.	1 of 1	PART NO.	BC-15G1S-04P-S486	A4
ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3°	3RD. ANGEL'S						UNITS
						Tony Kao	05/28/25			R	