

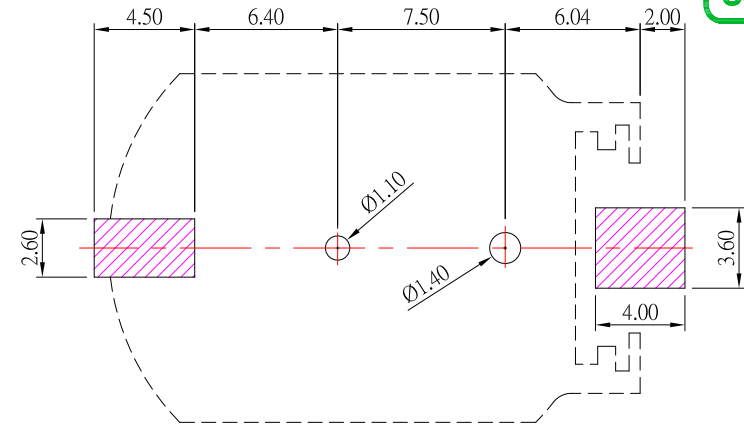
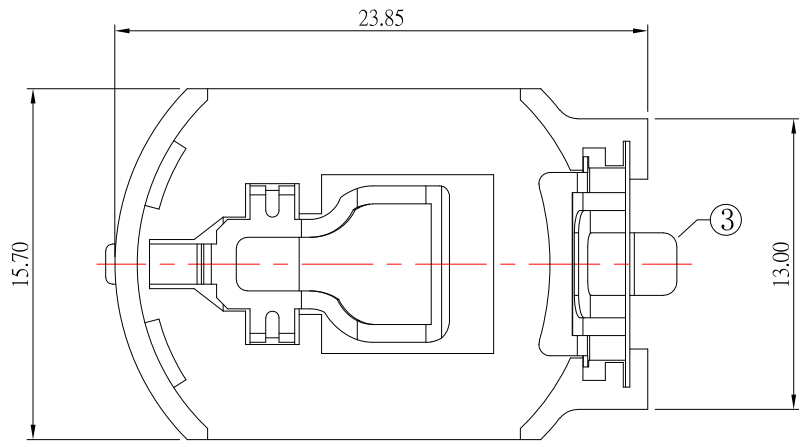


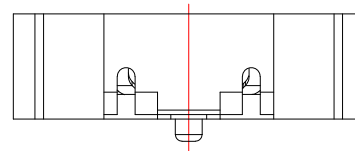


P. C. B LAYOUT
TOP VIEW

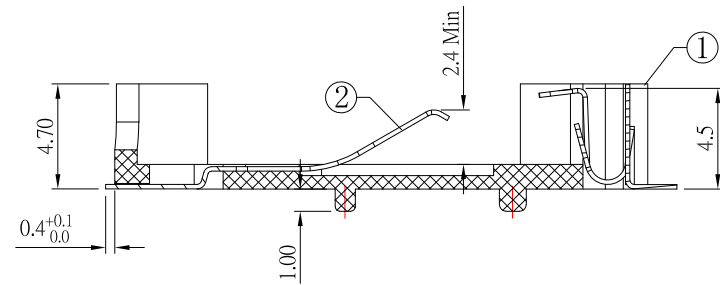

SPECIFICATION

- 1.Contact resistance: $\leq 30\text{m}\Omega$;
2. Insulation resistance: $\geq 100\text{M}\Omega$ (DC500V) ;
3. Withstand voltage: 500VAC.

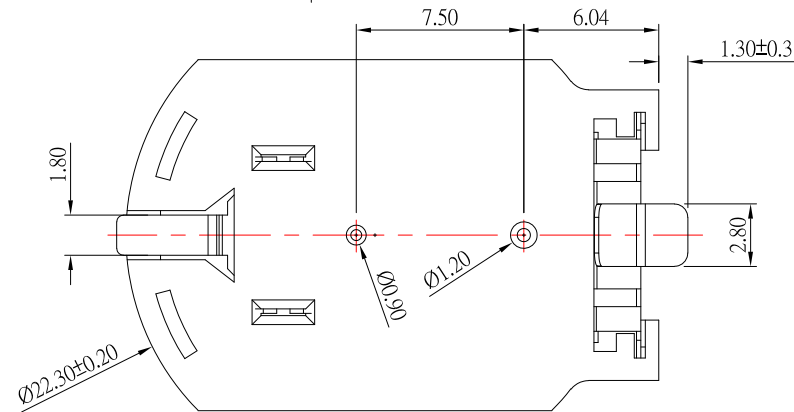

3	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	SPRING	1	PHOSPHOR BRONZE	Au-Plating
1	HOUSING	1	PA10T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

4	更新材質	Jack	101824
3	更新樣式	Jack	112222
2	更新圖面	Jack	070522
1	更新圖面	Jack	070122
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	10/17/24	FINISH	MODLE	2032 電池座
CHECKED BY:	DATE	SCALE	DWG NO.	BC-203203-S124
Jacky Chen	10/17/24	1 : 1	PART NO.	BC-203203-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	10/17/24			
				SIZE A4
				VER R4