

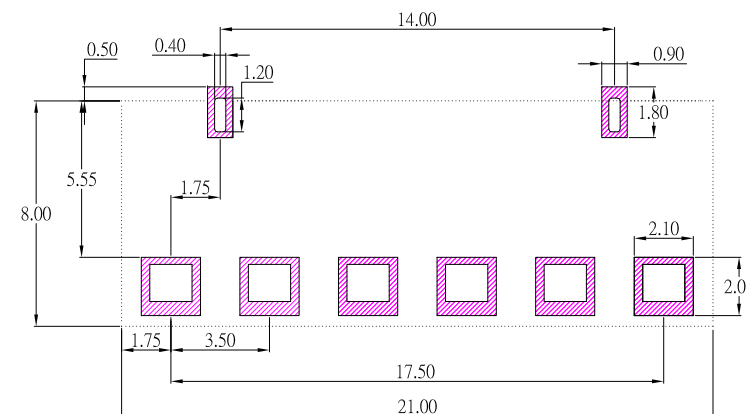
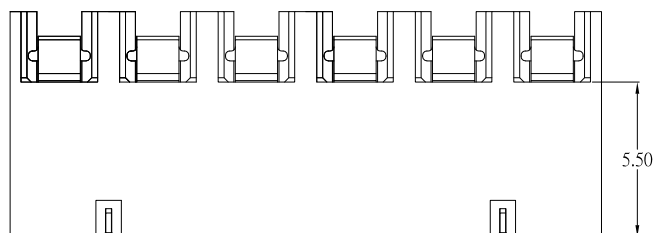


PART NO.	DIM A	DIM B
24	2.4	4.35±0.25
35	3.5	5.45±0.25

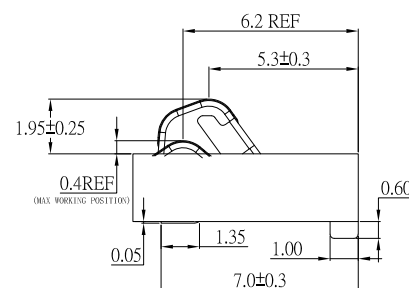

P.C.B LAYOUT

TOP VIEW

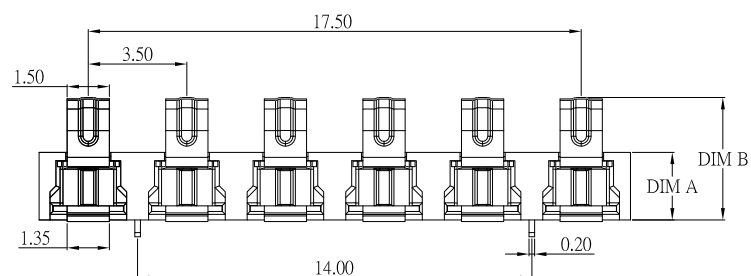

1. INSULATOR : LCP
2. CONTACT : PHOSPHOR BRONZE, GOLD PLATED OVER NICKEL
SPECIFICATION:

1. RATING : 24.0 , 3.0A
2. CONTACT RESISTANCE : 30mΩ
3. INSULATION RESISTANCE : 500MΩ Min
4. DIELECTRIC VOLTAGE : 500V
5. OPERATING TEMPERATURE : -40° C ~ 85° C

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle ± 0.2 ± 0.3 ± 0.4 ± 0.5 ± 0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY: Jack Lu	DATE 08/06/26	MAT'L		TITLE	CONNECTOR	
					CHECKED BY: Jacky Chen	DATE 08/06/26	FINISH		MODLE	BATTERY CONNECTOR	
					APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	BC-90xx0-6P-S505	SIZE A4
ITEM NO.	DESCRIPTION	DRAWN	DATE		Tony Kao	08/06/26	SHEET NO.	1 of 1	PART NO.	BC-90xx0-6P-S505	VER R