

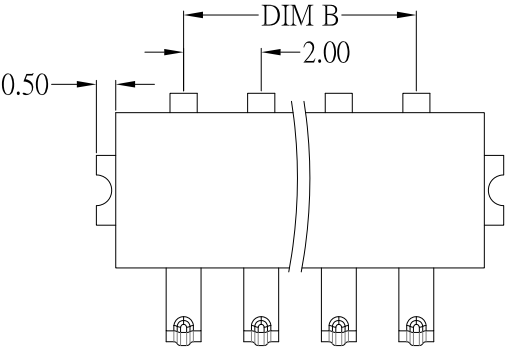
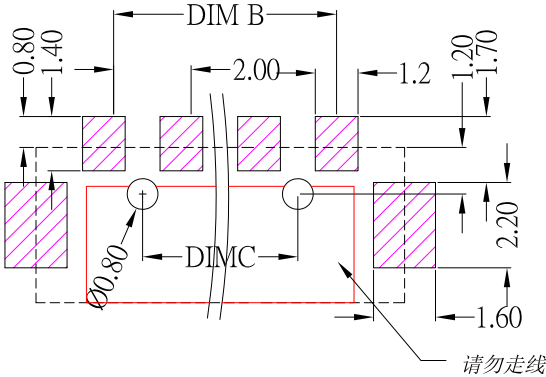
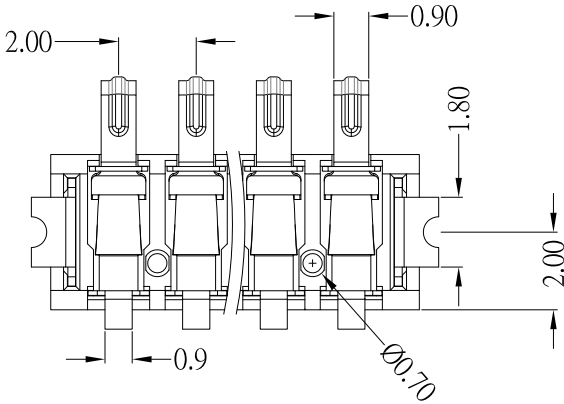


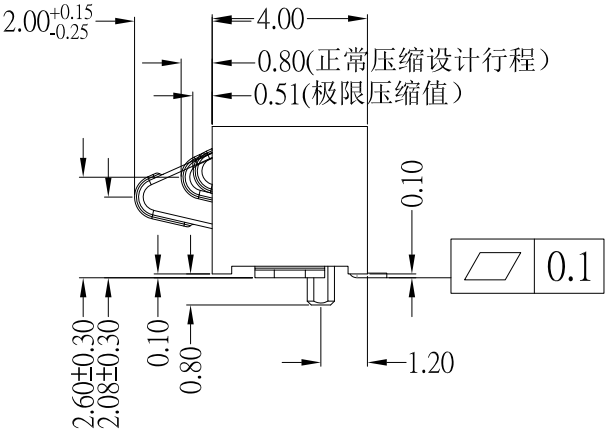

BC-W8801F-xx-S410

PART NO.	DIM A	DIM B	DIM C
03	7.50	4.0	2.0
04	9.50	6.0	4.0
05	11.5	8.0	6.0
06	13.5	10.0	8.0

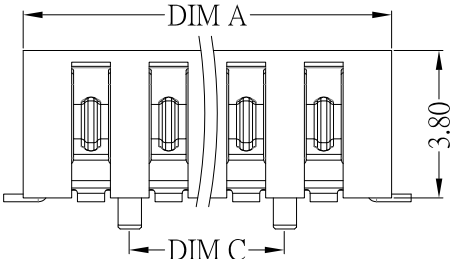

P.C.B LAYOUT

MATERIAL:

- 1.Housing: LCP,Black
- 2.Contact: Phosphor Bronze,Gold Plated

ELECTRICAL:

- 1.Rating: 12V , 2.0A
- 2.Contact Resistance: 30mΩ Max
- 3.Insulator Resistance: 500 MΩ Min
- 4.Withstanding Voltage: 500V AC
- 5.Operating Temperature: -40℃ ~ 85℃

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.						DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR			
										Jack Lu 04/08/25								
										CHECKED BY: DATE		FINISH		MODLE	BATTERY CONNECTOR			
										Jacky Chen 04/08/25								
										APPROVED BY: DATE		SCALE	1 : 1	DWG NO.	BC-W8801F-xx-S410	SIZE		
										Tony Kao 04/08/25						A4		
ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°						3RD. ANGEL'S		UNIT'S	MM	SHEET NO.	1 of 1	PART NO.	BC-W8801F-xx-S410	VER
																		R