

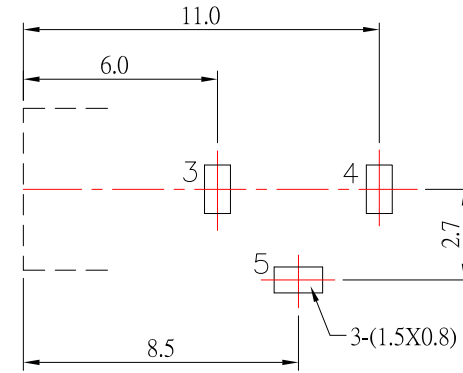
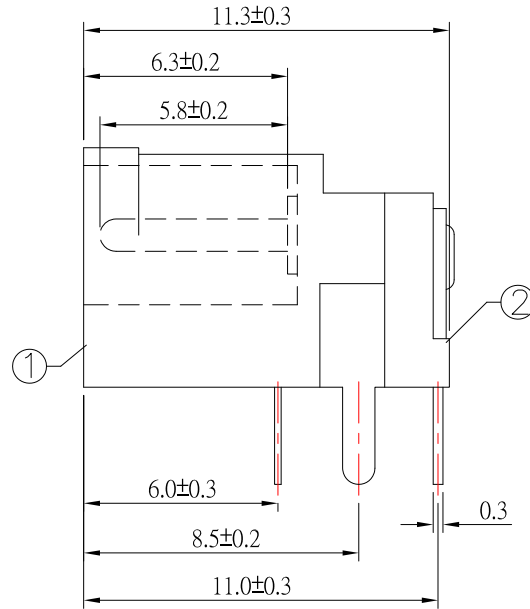
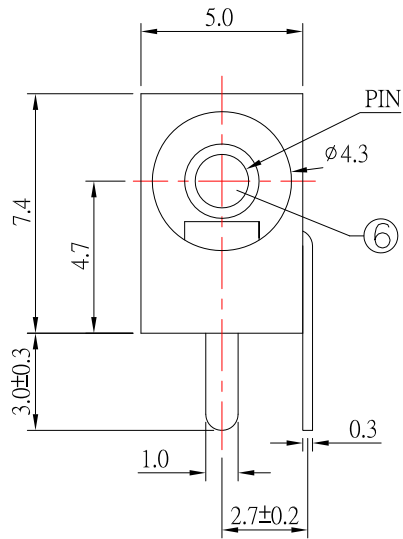


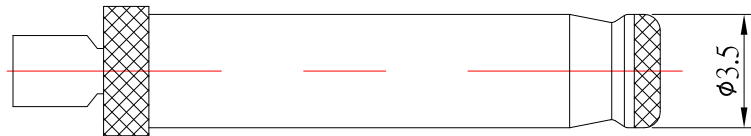

P.C.B LAYOUT
TOP VIEW

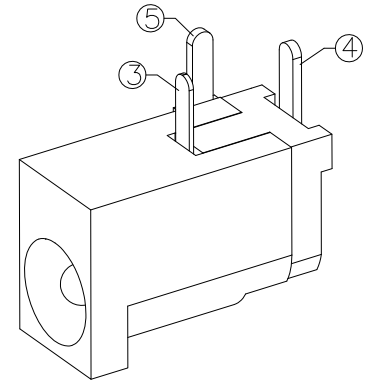

RECOMMENDED PLUG

MODEL NO.	DC-009-1-x-S124
SCHEMATIC	
CENTER PIN	Ø1.0 mm
	Ø1.3 mm

SPECIFICATION

- 1.Rating : DC 30V 1.5A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

6	PIN	1	BRASS	Ni-PLATED
5	CURVE PIECE	1	BRASS	Sn-PLATED
4	FLAT PIECE	1	BRASS	Sn-PLATED
3	SPRING	1	SUS	Sn-PLATED
2	COVER	1	PBT	
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	FINISH

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

06/20/19

CHECKED BY:

Jacky Chen

DATE

06/20/19

APPROVED BY:

Tony Kao

DATE

06/20/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

JACK

DC JACK

DC-009-1-x-S124

DC-009-1-x-S124

SIZE

A4

VER

R3

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新樣式	Lan	062019
2	更新圖面	Jack	112917
1	更新為A0版	Jack	100516