

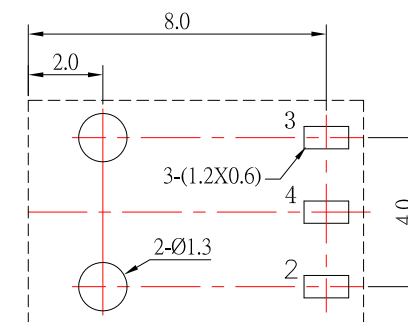
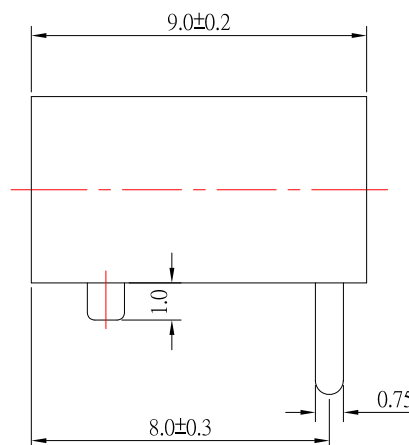
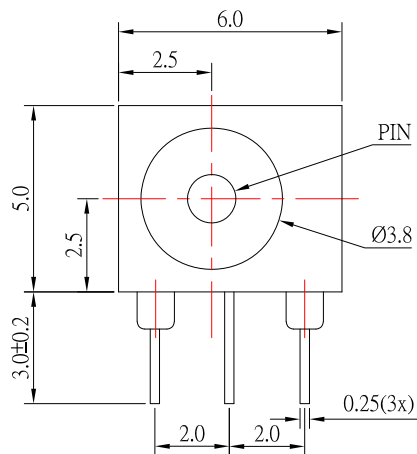
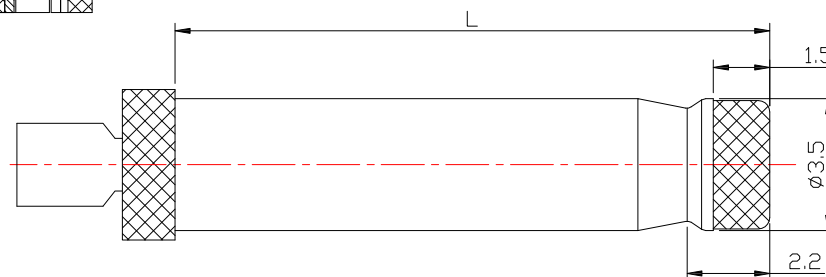


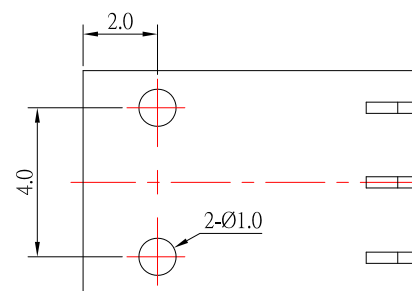

P.C.B LAYOUT
TOP VIEW

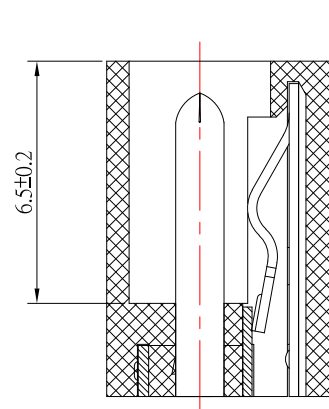

RECOMMENDED PLUG

MODEL NAME	DC-015-x-S124
SCHEMATIC	
CENTER PIN	Ø1.0 Ø1.3

SPECIFICATION

- 1.Rating : DC 30V , 2.0A ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles .

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
④	PIN	1	BRASS	Ag-Plating
③	CURVE PIECE	1	BRASS	Ag-Plating
②	SPRING	1	STAINLESS STEEL	Ag-Plating
①	HOUSING	1	PA9T	

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新圖面	Jack	01/09/25
1	更新為A0版	Jack	04/07/17

CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.		TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
--	--	--	--------------	--	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	01/09/25			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	01/09/25			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-015-x-S124
Tony Kao	01/09/25	1 : 1		
		SHEET NO.	PART NO.	DC-015-x-S124
		1 of 1		
				SIZE A4
				VER R2