
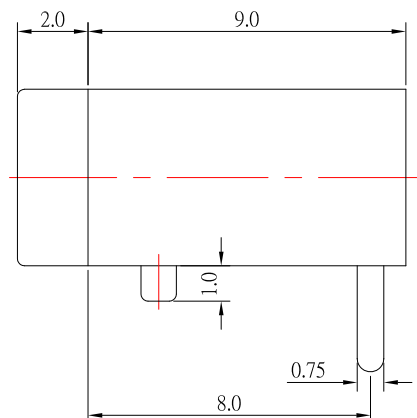
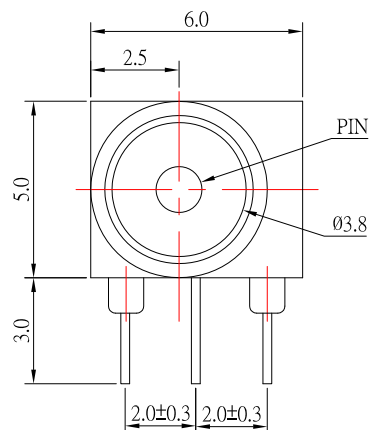
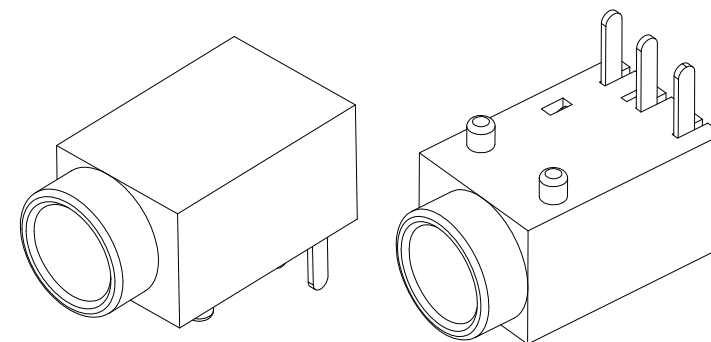
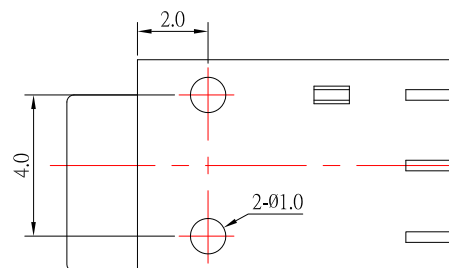


P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

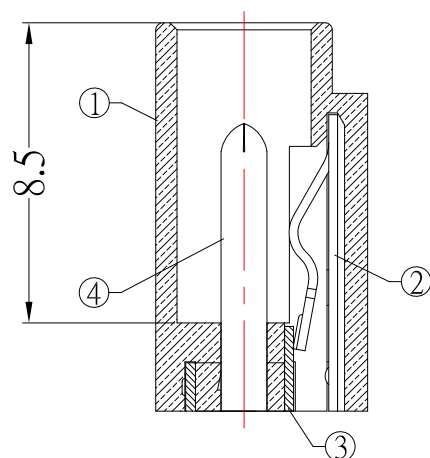

1. Rating : DC 30V 1.0A ;
2. Contact resistance : $\leq 50\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles .

MODEL NO.	DC-022-x-S124
SCHEMATIC	
CENTER PIN	Ø1.0 mm
	Ø1.3 mm

4	PIN	1	BRASS	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING	1	SUS	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	05/19/17					
CHECKED BY:	DATE	FINISH		MODLE	DC JACK	
Jacky Chen	05/19/17	SCALE	1 : 1	DWG NO.	DC-022-x-S124	SIZE A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	DC-022-x-S124	VER R
Tony Kao	05/19/17					

7			
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.



UNITS

MM