


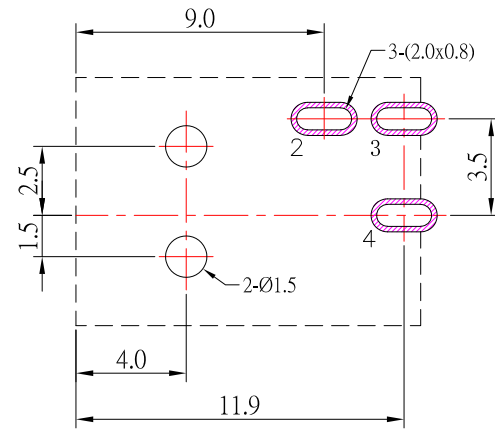
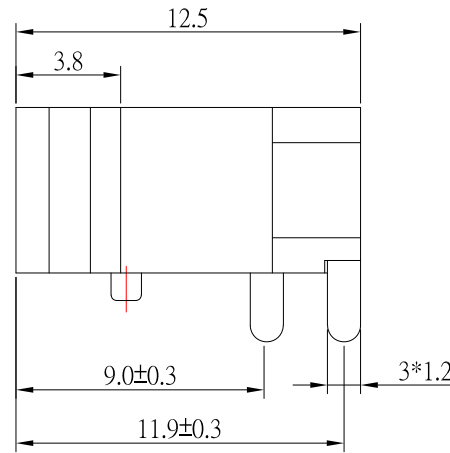


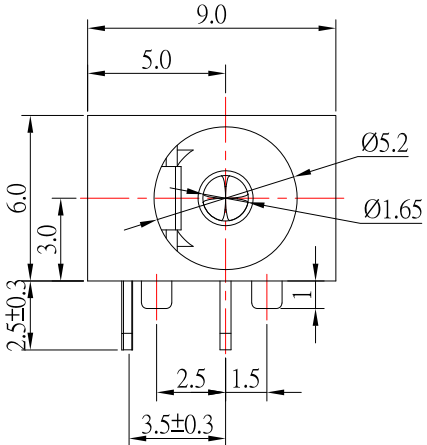

P.C.B LAYOUT
(TOP VIEW)

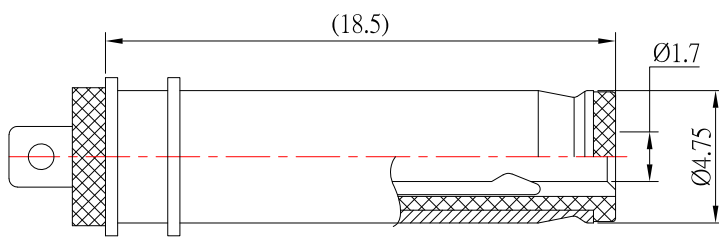


RECOMMENDED PLUG

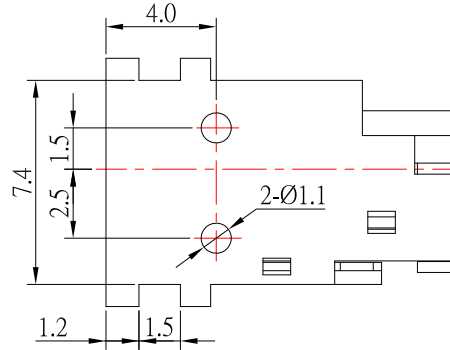

SPECIFICATION

- 1.Rating : DC 30V, 3.0A ;
- 2.Contact resistance : ≤ 30mΩ ;
- 3.Insulation resistance : ≥ 100MΩ ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles .

MODEL NO.	DC-026-1.65-S124
SCHEMATIC	
CENTER PIN	Ø1.65 mm

4	PIN	1	Phosphor Bronze	Ag-Plating
3	SPRING	1	Phosphor Bronze	Ag-Plating
2	CURVE PIECE	1	Brass	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

1

更新圖面

Jack

070725

ITEM NO.

DESCRIPTION

DRAWN

DATE

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2

Above 5 ~ 15 ±0.3

Above 15 ~ 30 ±0.4

Above 30 ~ 50 ±0.5

Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu

CHECKED BY: Jacky Chen

APPROVED BY: Tony Kao

DATE: 07/07/25

DATE: 07/07/25

DATE: 07/07/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE: JACK

MODLE: DC JACK

DWG NO.: DC-026-1.65-S124

PART NO.: DC-026-1.65-S124

SIZE: A4

VER: R1