

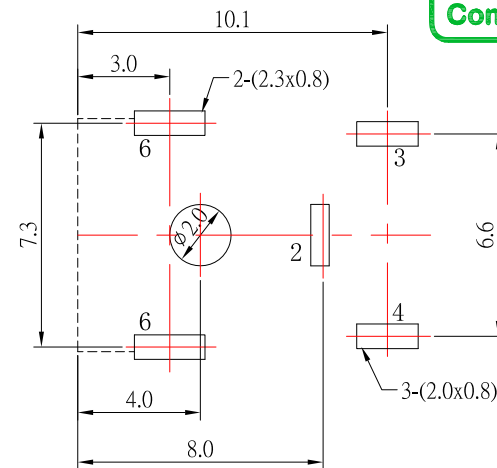
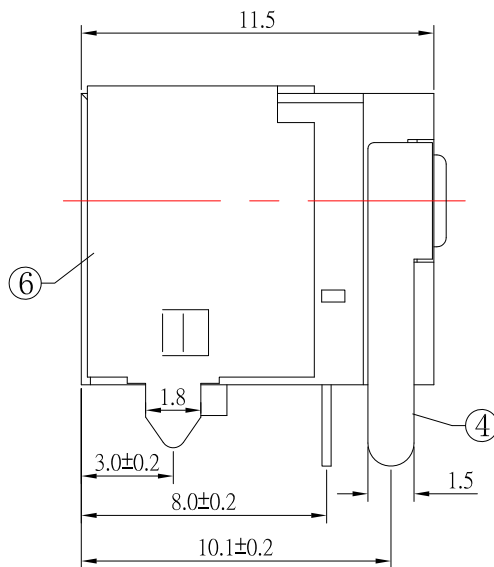


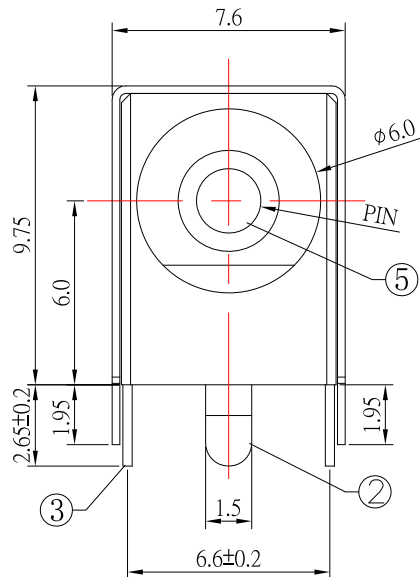


P.C.B LAYOUT MOUNTING PATTERN
(TOP-VIEW)

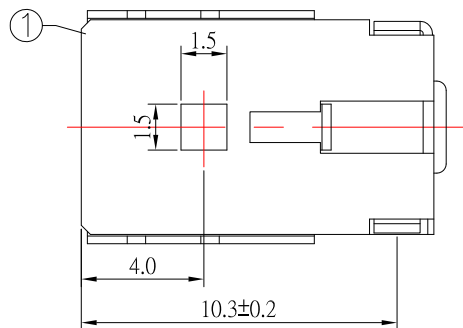

SPECIFICATION

- 1.Rating : DC 30V 2.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles ◦

MODEL NO.	DC-038S-x-S124
SCHEMATIC	
CENTER PIN	$\phi 2.0\text{mm}$
	$\phi 2.5\text{mm}$

⑥	Coat	1	Brass	Ni-Plating
⑤	Pin	1	Brass	Ni-Plating
④	Contact Foot	1	Brass	Ag-Plating
③	Curve Piece	1	Brass	Ag-Plating
②	Spring	1	SUS	Ag-Plating
①	Housing	1	PPT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 09/10/20
DATE: 09/10/20
DATE: 09/10/20

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: JACK
MODLE: DC JACK
DWG NO.: DC-038S-x-S124
PART NO.: DC-038S-x-S124

SIZE: A4
VER: R1