
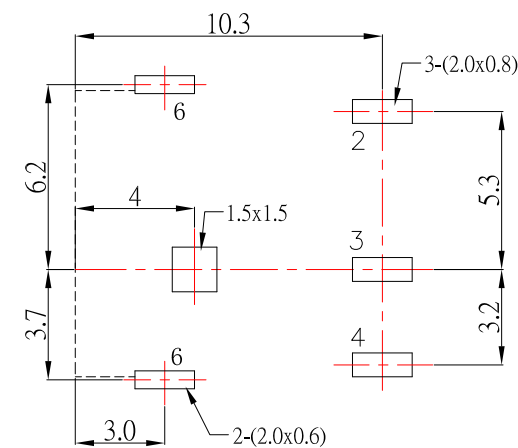
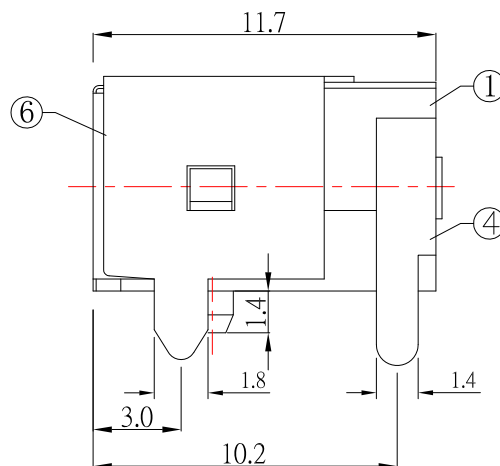
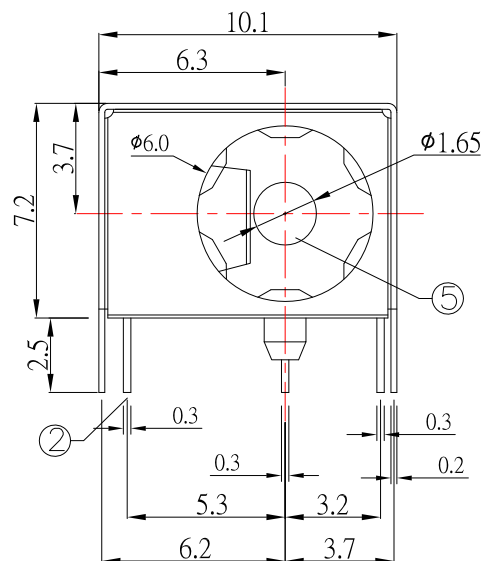
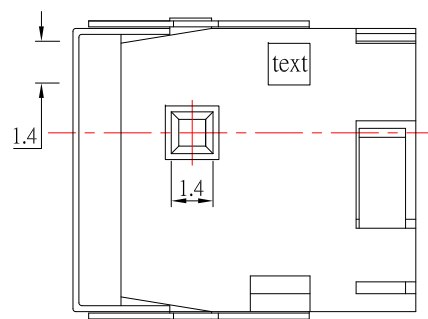


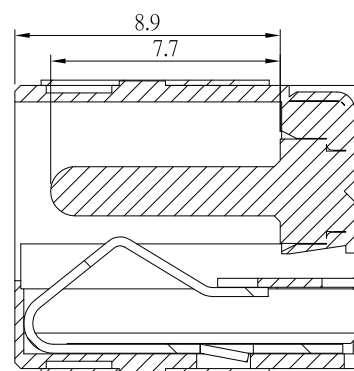

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 20V 5.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

10	更新樣式	lan	041719
9	新增尺寸	Jack	100418
8	更新料號	Jack	050318
7	更新材質及鍍層	Jack	080417
6	更新life test	Jack	072817
5	更新圖面樣式	Jack	051017
4	新增PLUG圖示	Jack	011017
3	更新腳位編號	Jack	010617
2	更新為AO版	Jack	060816
1	更新Rating	Jack	121515
ITEM NO.	DESCRIPTION	DRAWN	DATE

13	更新料號	Jack	061821
12	新增尺寸	Jack	103019
11	更新MODLE	Jack	073119

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Above 50 ~ 100	± 0.3				

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	06/18/21					
CHECKED BY:	DATE	FINISH		MODLE	DC JACK 高電流 / 帶彈片帶外殼	
Jacky Chen	06/18/21					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	DC-048HS5-1.65-S214	SIZE A4
Tony Kao	06/18/21	SHEET NO.	1 of 1	PART NO.	DC-048HS5-1.65-S214	VER R1