

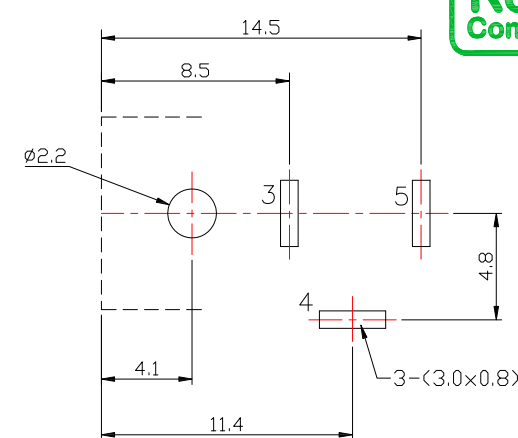
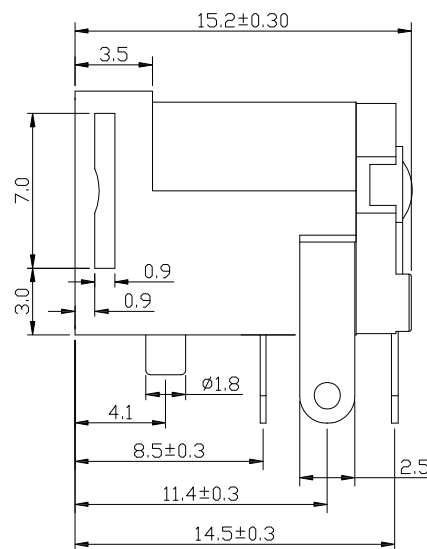
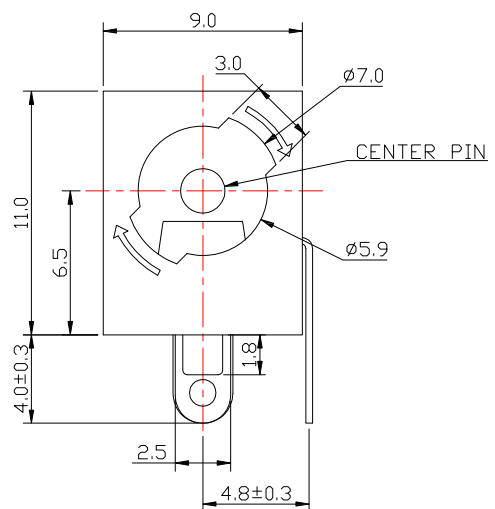


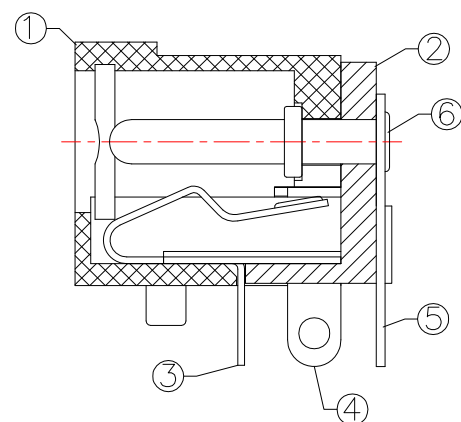

P.C.B LAYOUT
TOP VIEW

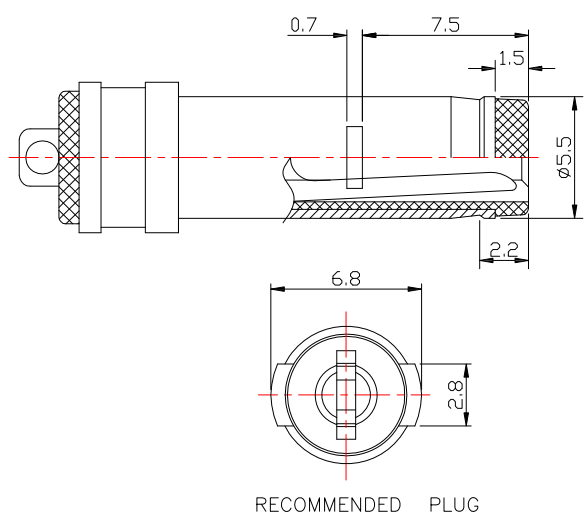

MODEL NO.	DC-062-4-x
SCHEMATIC	
CENTER PIN	φ2.0mm
	φ2.5mm

SPECIFICATION

1. Rating : DC 30V , 3.0A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

⑥	PIN	1	BRASS	Ni-Plating			
⑤	FLAT FOOT	1	BRASS	Sn-Plating			
④	CURVE PIECE	1	BRASS	Sn-Plating			
③	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating			
②	COVER	1	PBT				
①	HOUSING	1	PBT				
NO.	DESCRIPTION	QTY	MATERIAL	PLATING			
DRAWN BY: DATE		MAT'L	TITLE	JACK			
Jack Lu 06/01/21							
CHECKED BY: DATE		FINISH	MODLE	DC JACK 帶鎖			
Jacky Chen 06/01/21							
APPROVED BY: DATE		SCALE	1 : 1	DWG NO.	DC-062-4-x-S124	SIZE	
Tony Kao 06/01/21						SHEET NO.	1 of 1
							VER
							R

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	$\pm 0.3^\circ$				