


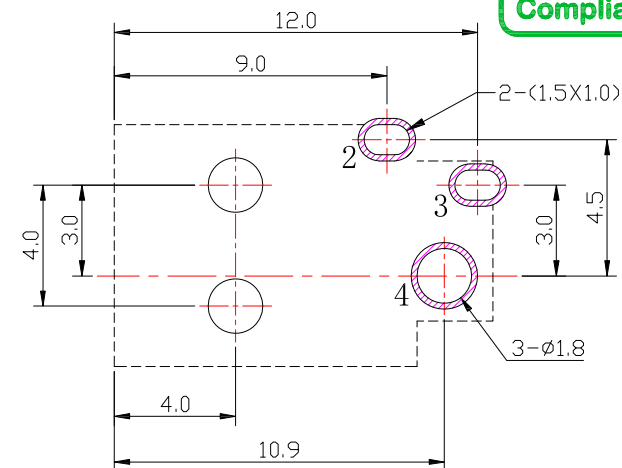
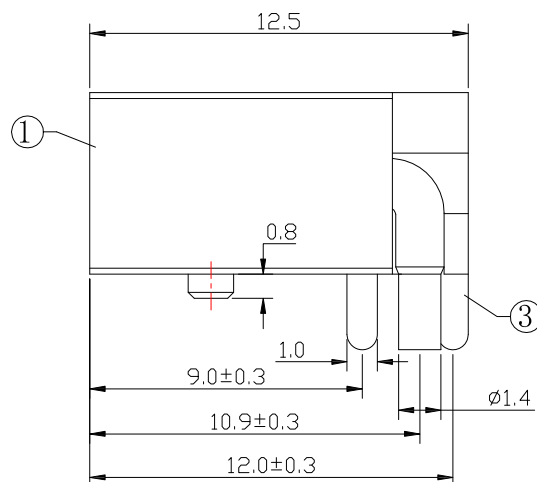


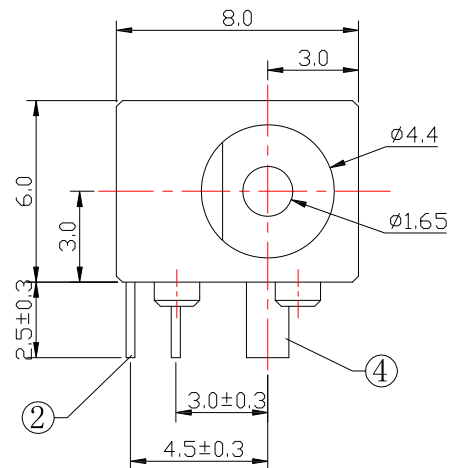

P.C.B LAYOUT
(TOP VIEW)

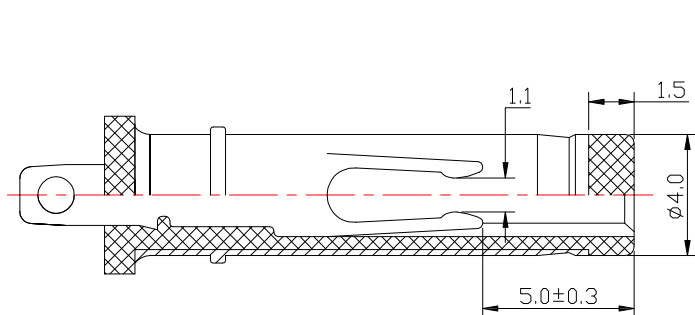

RECOMMENDED PLUG

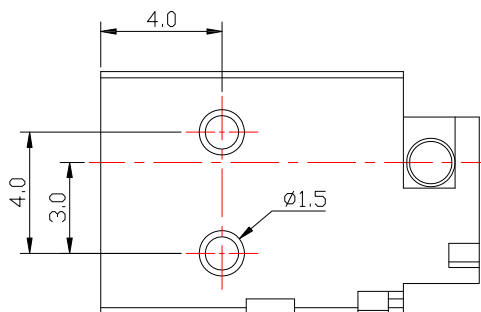

MODEL NO.	DC-066
SCHEMATIC	

SPECIFICATION

- 1.Rating : DC 30V , 2.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles .

4	PIN	1	BRASS	Ni-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY: Jack Lu	DATE 08/29/22	MAT'L		TITLE JACK		
					CHECKED BY: Jacky Chen	DATE 08/29/22		FINISH		MODLE DC JACK	
2	更新圖面	Jack	082922				APPROVED BY: Tony Kao	DATE 08/29/22	SCALE 1 : 1	DWG NO. DC-066-1.65-S124	SIZE A4
1	更新為A0版	Jack	100516						SHEET NO. 1 of 1	PART NO. DC-066-1.65-S124	VER R2
ITEM NO.	DESCRIPTION	DRAWN	DATE								
A	B			C	D	E	F	G	H	I	