




Model NO.	DC-081HS-1.65	DC-081HS-2.0	DC-081HS-2.5
PIN(X)	φ1.65	φ2.0	φ2.5



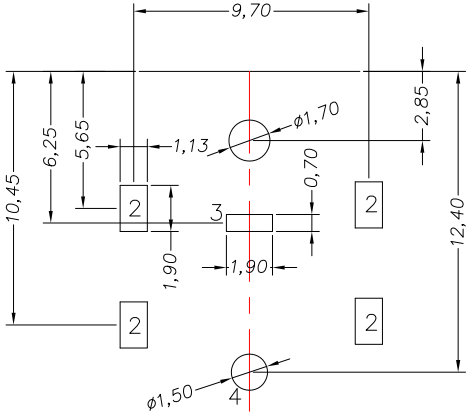



P.C.B LAYOUT
TOP VIEW


SPECIFICATION

- 1.Rating : DC 24V, 10.0A
- 2.Contact resistance : ≤ 50mΩ
- 3.Insulation resistance : ≥ 100MΩ
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

6	COVER	1	SUS	
5	SPACER	1	PA9T (BLACK)	
4	BERRY PIN	1	BRASS	Ni-Plating
3	CCAW	1	PHOSPHOR BRONZE	Tin Plated over Ni
2	FOOT COVERLET	1	SUS	Ni-Plating
1	HOUSING	1	PA9T (BLACK)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

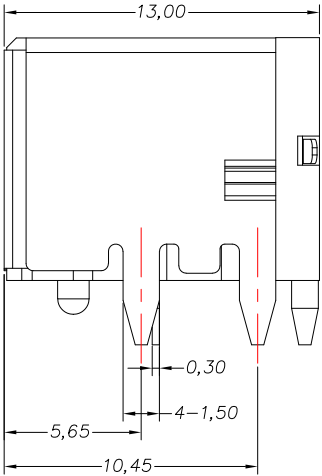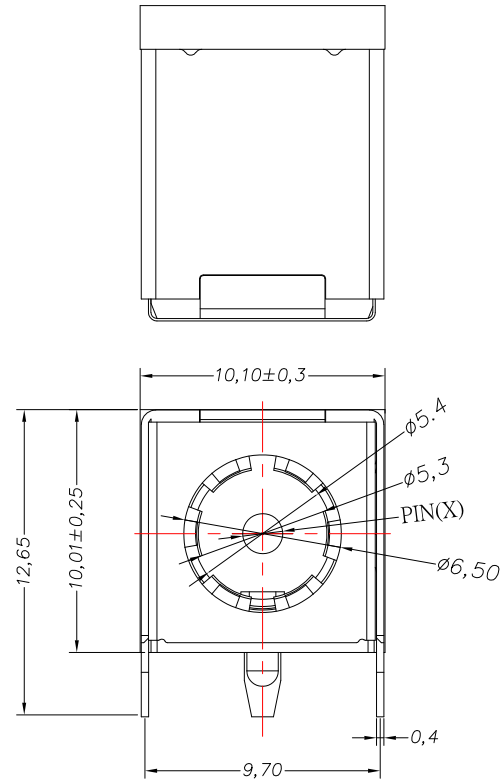

MODEL NO.	DC-081HS-x
SCHEMATIC	

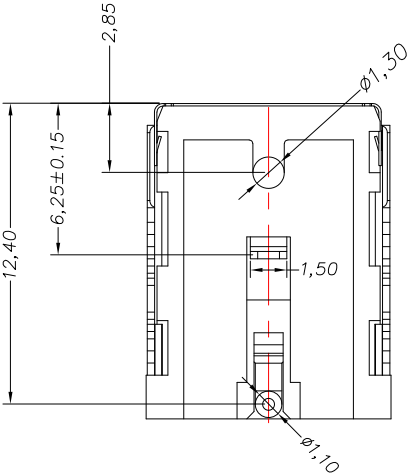

17	更新尺寸和材質和尺寸選項	Jack	122325
16	更新材質	Jack	082621
15	更新尺寸公差	Jack	082521
14	更新鍍層	Jack	053121
13	更新材質及鍍層	Jack	052821
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	12/23/25	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-081HS-x-S214
Jacky Chen	12/23/25	1 : 1	PART NO.	DC-081HS-x-S214
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	12/23/25			