

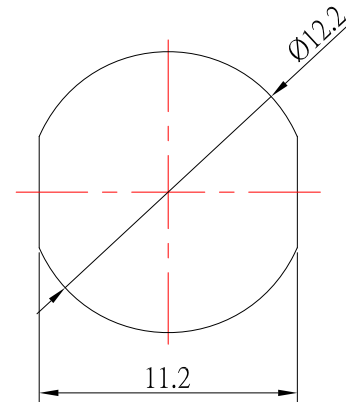
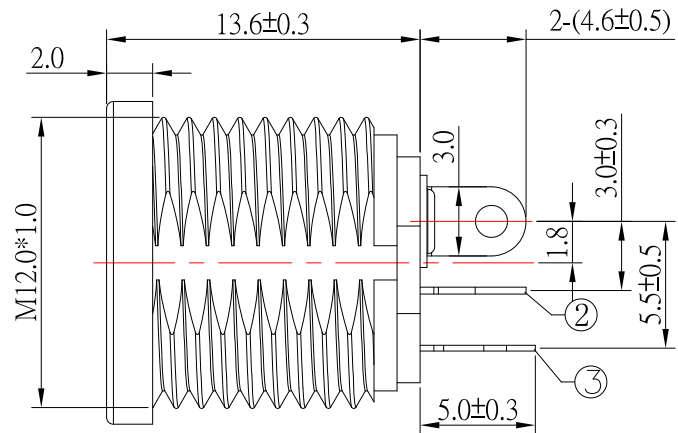
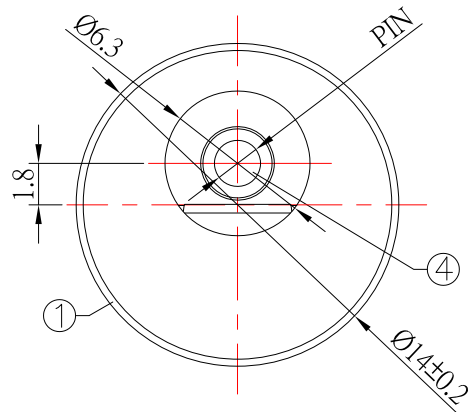
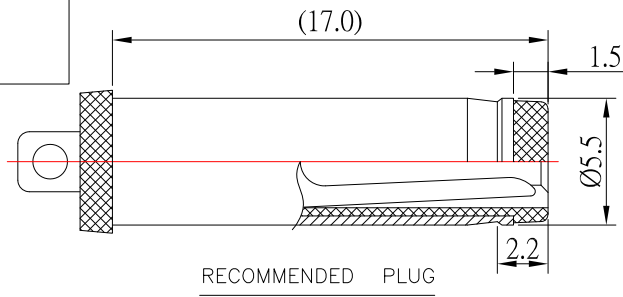


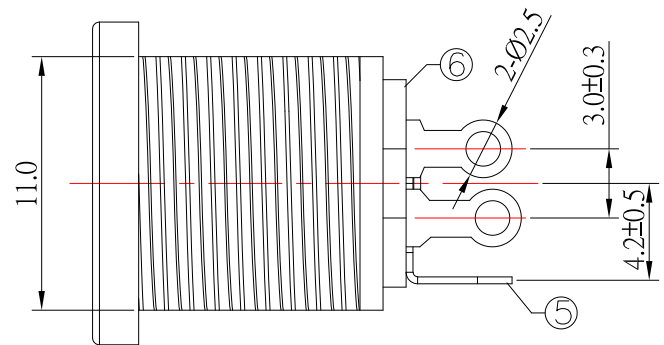

MOUNTING HOLE DIMENSION

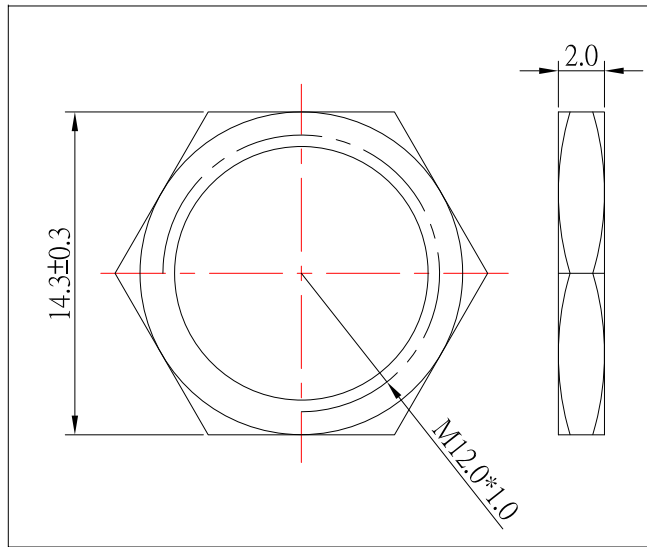

MODEL NO.	DC-D022-x-S124
SCHEMATIC	5/4 (+)
	2
CENTER PIN	3 (-)
	Ø2.0mm
	Ø2.5mm

SPECIFICATION

- Rating : DC 30V , 3.0A
- Contact resistance : $\leq 30m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles

⑦	NUT	1	H59	Ni-Plating
⑥	COVER	1	PBT	
⑤	CONTACT FOOT	1	BRASS	Sn-Plating
④	PIN	1	BRASS	Ni-Plating
③	SPRING	1	PHOSPHOR BRONZE	Sn-Plating
②	FLAT PIECE	1	BRASS	Sn-Plating
①	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

9	更新COVER材質	Jack	082924
8	更新圖面	Jack	103122
7	更新尺寸	Jack	051022
6	更新NUT材質	Jack	041922
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/29/24			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	08/29/24			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-D022-x-S124
Tony Kao	08/29/24	1 : 1		
		SHEET NO.	PART NO.	DC-D022-x-S124
		1 of 1		
				SIZE A4
				VER R9