
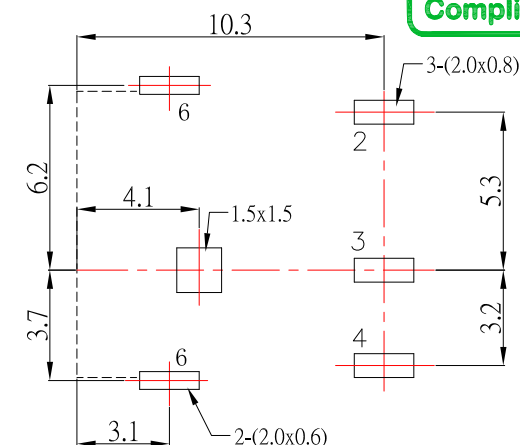

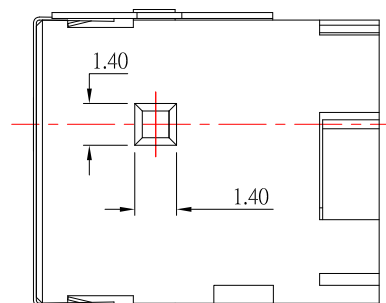
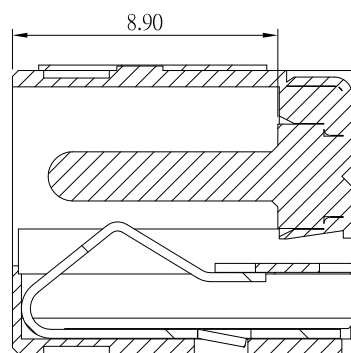
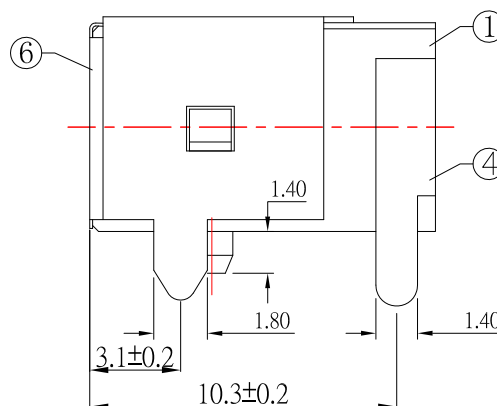


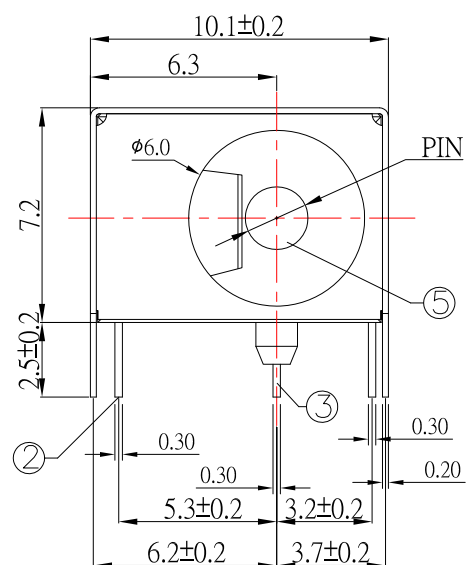

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

1. Rating : DC 20V 5.0A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 10,000 cycles

MODEL NO.	DC-D044B-x
SCHEMATIC	 4 (5) 2 3
CENTER PIN(X)	φ1.65 mm
	φ2.0 mm
	φ2.5 mm

6	COVER	1	SUS	Ni-Plating
5	PIN	1	H59	Ni-Plating
4	CONTACT FOOT	1	BRASS	Tin / Ni-Plating
3	CURVE PIECE	1	BRASS	Tin / Ni-Plating
2	SPRING PIECE	1	C17200	Tin / Ni-Plating
1	HOUSING	1	PA9T	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

7			
1	更新圖面尺寸	Jack	042518
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE		MAT'L		TITLE	JACK	
Jack Lu	04/25/18					
CHECKED BY: DATE		FINISH		MODLE	DC JACK	
Jacky Chen	04/25/18					
APPROVED BY: DATE		SCALE	1 : 1	DWG NO.	DC-D044B-x-S214	SIZE A4
Tony Kao	04/25/18	SHEET NO.	1 of 1	PART NO.	DC-D044B-x-S214	VER R1