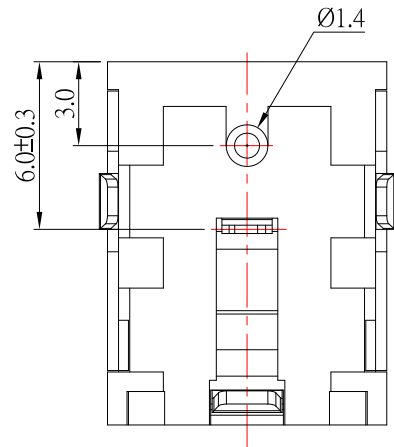
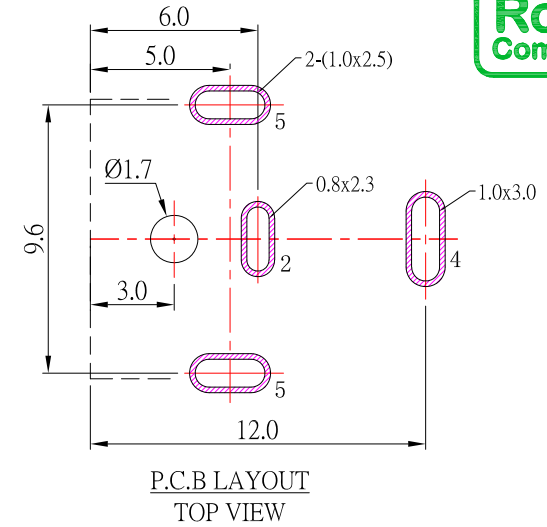
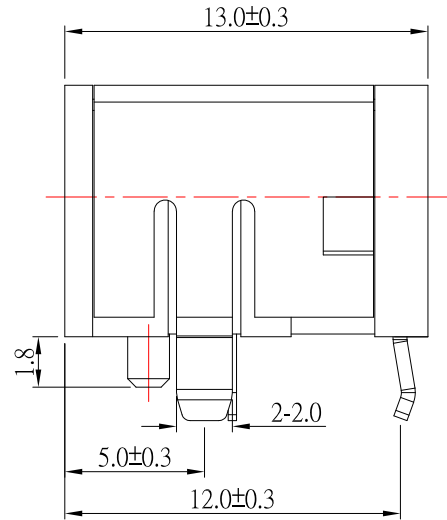
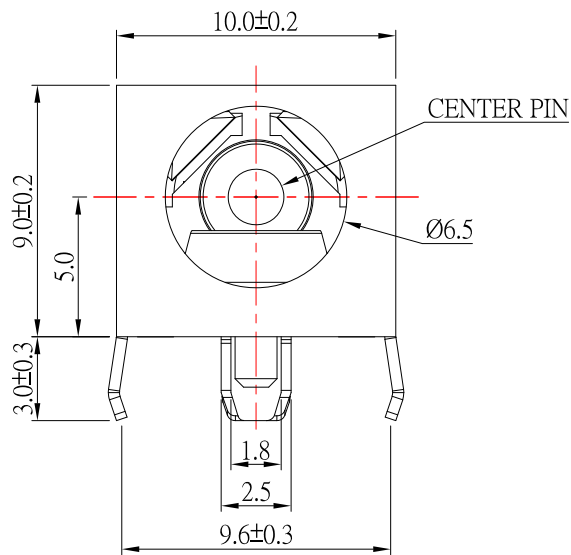


RECOMMENDED PLUG

SPECIFICATION

- 1.Rating : DC 24V , 8.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

MODEL NO.	DC-D104-x
SCHEMATIC	 3/4 (+)  2 (-)
CENTER PIN	$\phi 2.0\text{ mm}$ $\phi 2.5\text{ mm}$

5	COAT	1	SPCC	Sn-Plating
4	FLAT FOOT	1	BRASS	Sn-Plating
3	PIN	1	BRASS	Ni-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	03/18/25	FINISH	MODLE	DC JACK 高電流
CHECKED BY:	DATE	SCALE	DWG NO.	DC-D104-x-S124
Jacky Chen	03/18/25	1 : 1	PART NO.	DC-D104-x-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	03/18/25			

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S 

UNITS MM

ITEM NO. DESCRIPTION DRAWN DATE