

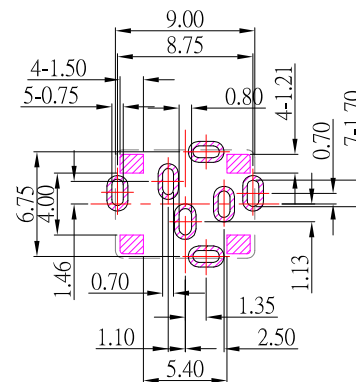
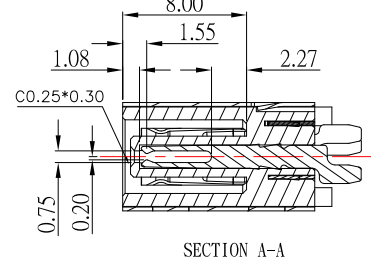
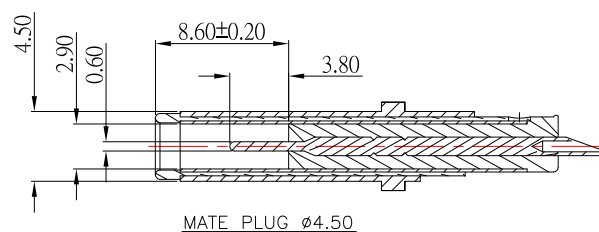

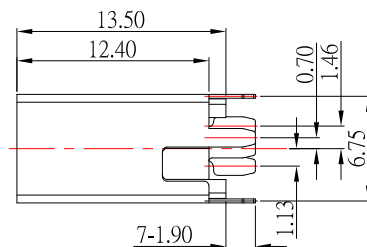



DATE CODE:
YYMMDD
YY:YEAR(15~)
MM:MONTH(01~12)
DD:DAY(01~31)



P.C.B LAYOUT
TOP VIEW

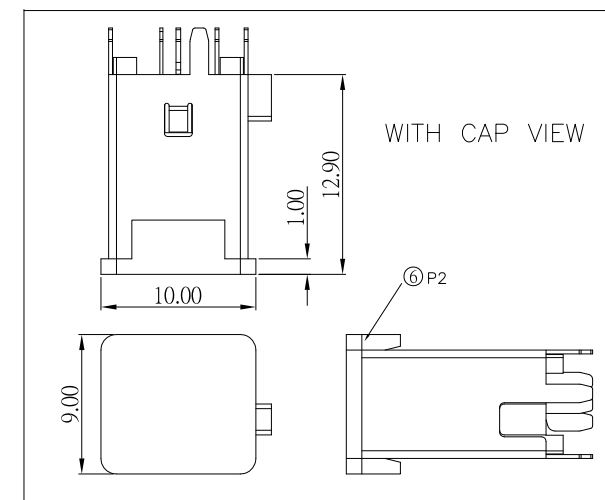

MATE PLUG Ø4.50

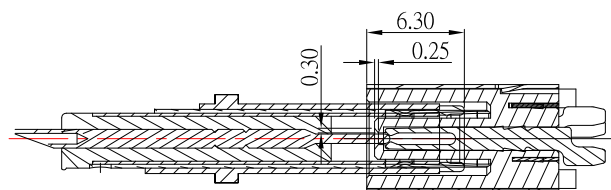

MATCHED

SCHEMATIC	
	M2 (SPRING PIN)
	M1 (SIGNAL PIN)
	M3 (SPRING PIN)

SPECIFICATION

- Rating : DC 30V, 8.0A
- Contact resistance : $\leq 30\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 2-30N
- life test : 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑥	CAP	1	PA10T	
⑤	M3 SPRING	1	PHOSPHOR BRONZE	Au+Ni-Plating
④	M2 SPRING	1	PHOSPHOR BRONZE	Au+Ni-Plating
③	M1 SIGNAL	1	PHOSPHOR BRONZE	Au+Ni-Plating
②	SHELL	1	SUS	Ni-Plating
①	HOUSING	1	PA10T	

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/31/19			
CHECKED BY:	DATE	FINISH	MODLE	
Jacky Chen	10/31/19			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	10/31/19	1 : 1	DC-D287AVH-0.6-S214	A4
		SHEET NO.	PART NO.	VER
		1 of 1	DC-D287AVH-0.6-S214	R

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------