

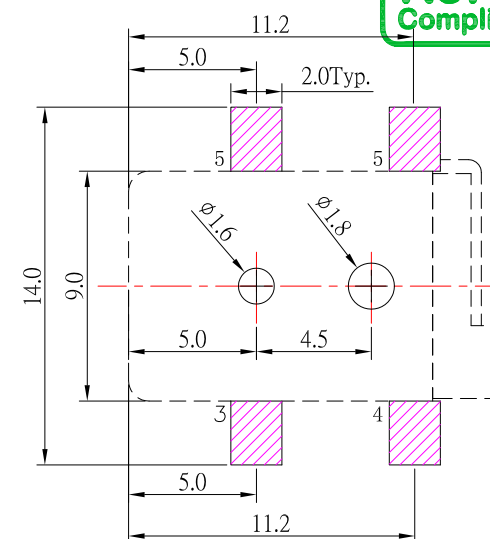
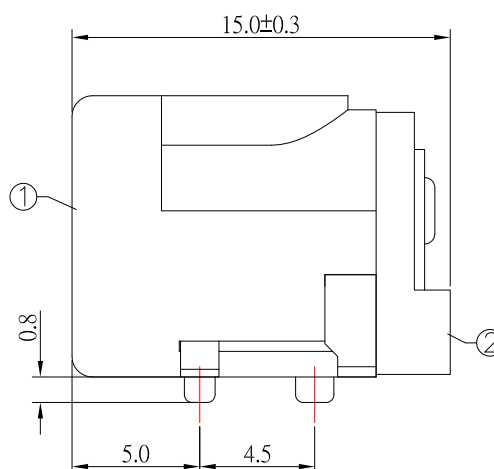
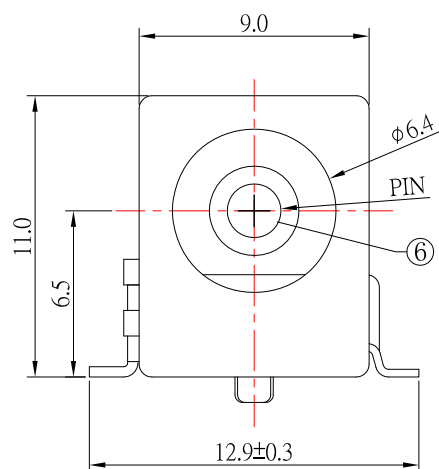


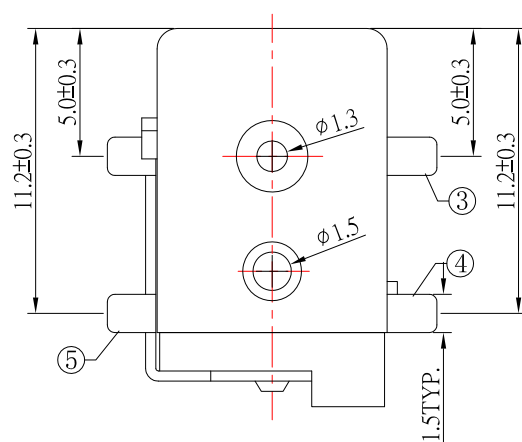

P. C. B LAYOUT
TOP VIEW



MODEL NO.	DC-016B-x
SCHEMATIC	 5 (6) 4 3
CENTER PIN	$\phi 2.0\text{mm}$ $\phi 2.5\text{mm}$

SPECIFICATION

1. Rating : DC 30V, 2.0A (12V, 5.0A) ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles °

6	PIN	1	BRASS	Ni-Plating
5	FLAT FOOT	1	BRASS	Ag-Plating
4	CURVE PIECE	1	BRASS	Ag-Plating
3	SPRING PIECE	1	BRONZE	Ag-Plating
2	COVER	1	PA9T	
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
07/09/20

CHECKED BY:
Jacky Chen

DATE
07/09/20

APPROVED BY:
Tony Kao

DATE
07/09/20

MAT'L		TITLE	JACK
FINISH		MODLE	DC JACK 小柱
SCALE	1 : 1	DWG NO.	DC-016B-x-S124
SHEET NO.	1 of 1	PART NO.	DC-016B-x-S124

SIZE
A4
VER
R2