


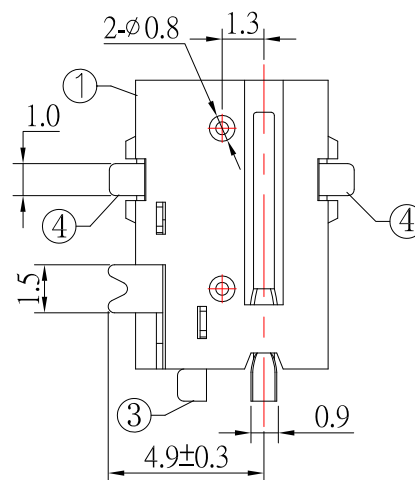
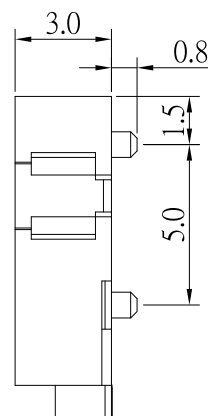


RECOMMENDED PLUG

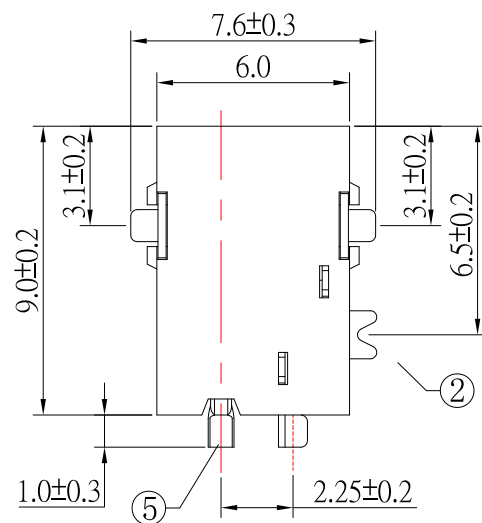

MODEL NO.	DC-057D-0.65
SCHEMATIC	

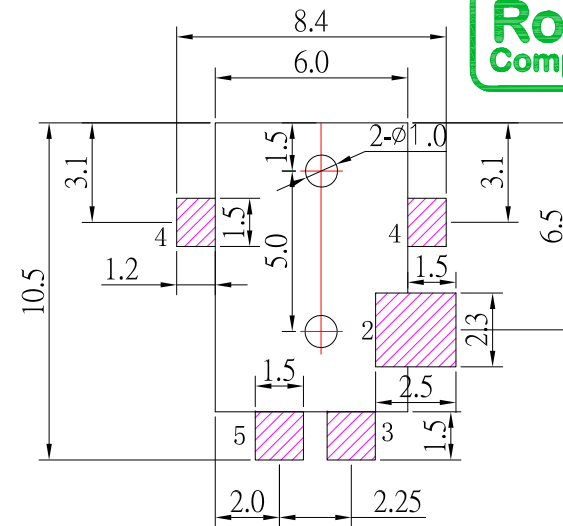

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

SPECIFICATION

- 1.Rating : DC 30V , 1.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 2-20N
- 6.life test : 5,000 cycles °

⑤	PIN	1	BRASS	Ni-Plating
④	CURVE PIECE	1	BRASS	Ag-Plating
③	CURVE PIECE	1	BRASS	Au-Plating
②	SPRING	1	SUS	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/18/22
DATE: 11/18/22
DATE: 11/18/22

MAT'L		TITLE	JACK
FINISH		MODLE	DC JACK
SCALE	1 : 1	DWG NO.	DC-057D-0.65-S124
SHEET NO.	1 of 1	PART NO.	DC-057D-0.65-S124

SIZE
A4
VER
R3

3	更新鍍層	Jack	111822
2	新增尺寸	Jack	120820
1	更新材質	Jack	052118
ITEM NO.	DESCRIPTION	DRAWN	DATE