
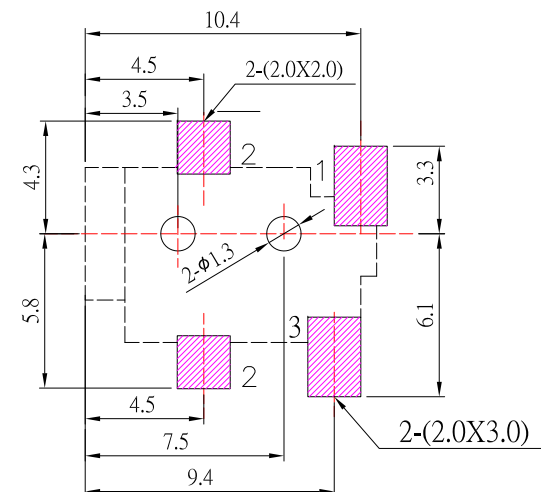
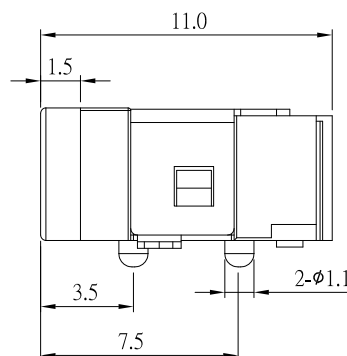
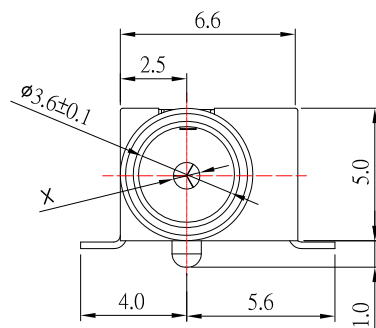
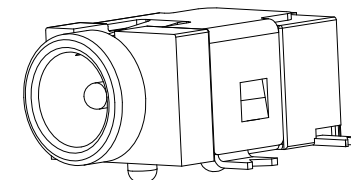

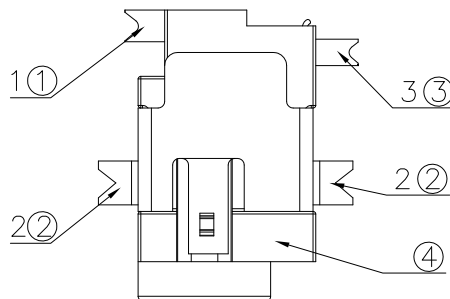


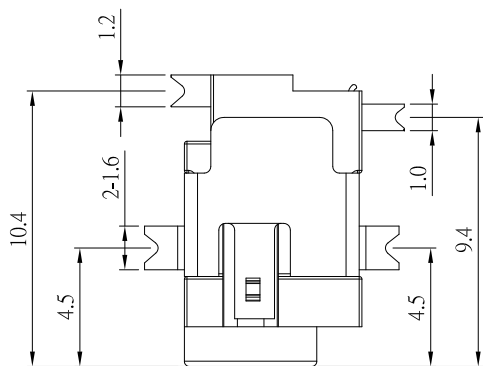

MODEL NO.	DC-060D-x-S187
SCHEMATIC	
CENTER PIN	$\phi 1.0 \text{ mm}$ $\phi 1.3 \text{ mm}$

- 1.Rating : DC 16V 2.0A
- 2.Contact resistance : $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

④	HOUSING	1	PA9T(Black)	
③	TERMINAL#3	1	PHOSPHOR BRONZE	Ag-Plating
②	TERMINAL#2	1	PHOSPHOR BRONZE	Ag-Plating
①	TERMINAL#1	1	BRASS	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

7			
1	新增SPEC	Jack	110215
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGELUS



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	11/02/15					
CHECKED BY:	DATE	FINISH		MODLE	DC JACK	
Jacky Chen	11/02/15	SCALE	1 : 1	DWG NO.	DC-060D-x-S187	SIZE A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	DC-060D-x-S187	VER R1
Tony Kao	11/02/15					