
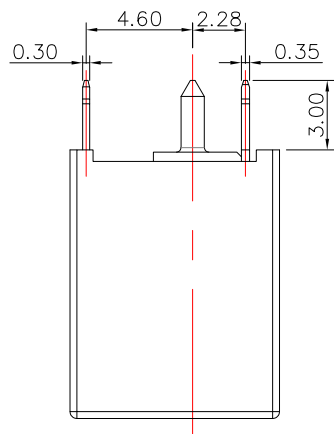
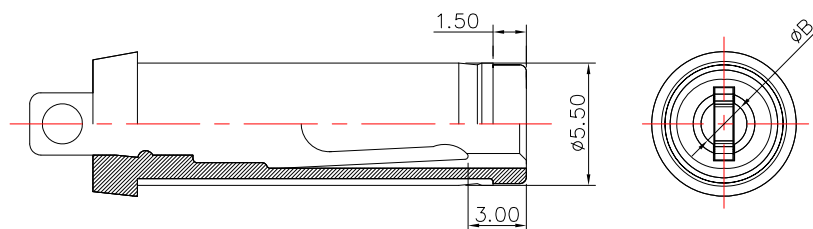
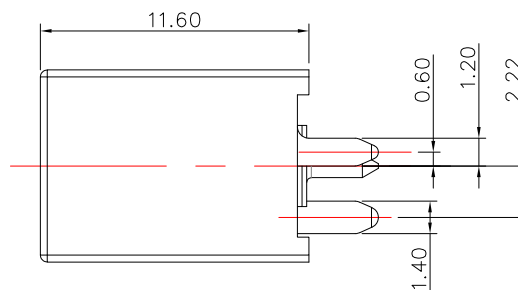


2.5	$\varnothing 2.5^{+0}_{-0.10}$	$\varnothing 2.55^{+0.1}_{-0}$
2.0	$\varnothing 2.0^{+0}_{-0.10}$	$\varnothing 2.05^{+0.1}_{-0}$
1.65	$\varnothing 1.65^{+0}_{-0.10}$	$\varnothing 1.7^{+0}_{-0.1}$
PART NO.	CENIER PIN DIA. ØA	PLUG DIA. ØB

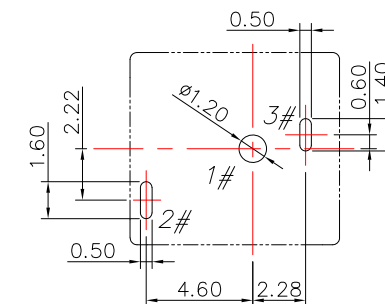

RECOMMENDED PLUG
ø5.5 PLUG

MODEL NO.	DC-D3039JV-X-S45
SCHEMATIC	

- 1.Rating : DC 24V, 7.0A
- 2.Insulation resistance : $\geq 100\text{M}\Omega$
- 3.Withstand voltage : 500VAC
- 4.Insertion and extraction force : 3-30N
- 5.life test : 5.000 cycles

④	CONTACT PIN	1	H59	Ni plating
③	SHUNT CONTACT	1	Brass	Tin Plating
②	TIP SPRING	1	Phosphor Bronze	Tin Plating
①	HOUSING	1	PA10T	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

				 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.						DRAWN BY: DATE Jack Lu 01/03/25		MAT'L		TITLE	JACK	
				TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S  UNITS MM						CHECKED BY: DATE Jacky Chen 01/03/25		FINISH		MODLE	DC JACK 180度 插板	
										APPROVED BY: DATE Tony Kao 01/03/25		SCALE	1 : 1	DWG NO.	DC-D3039JV-x-S457	SIZE A4
ITEM NO.	DESCRIPTION	DRAWN	DATE													SHEET NO.