

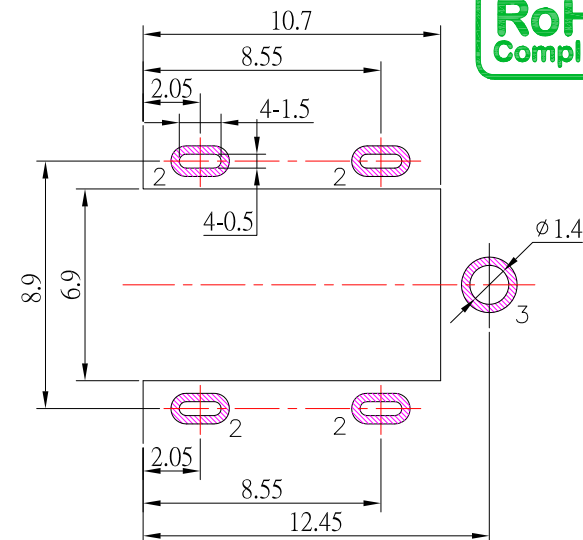
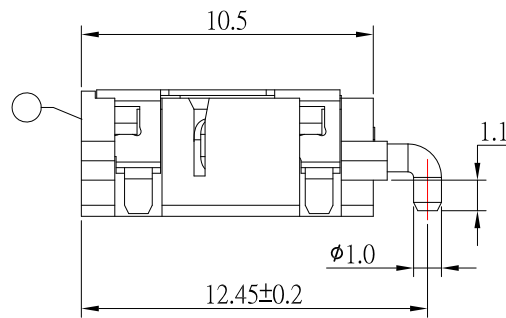
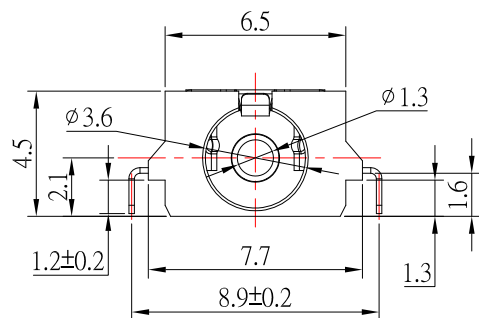


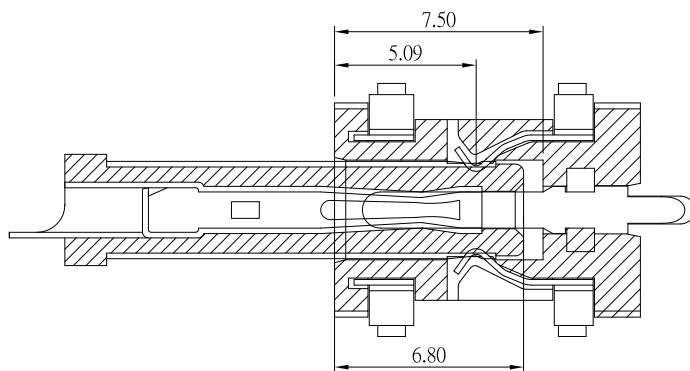

P.C.B LAYOUT
(TOP VIEW)

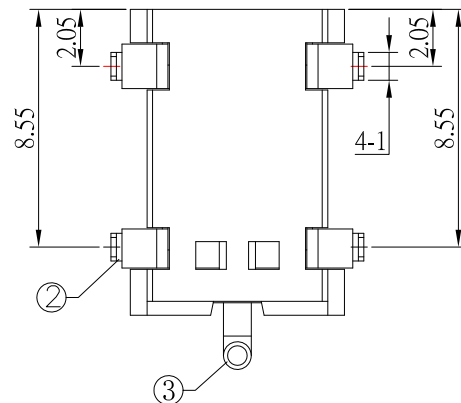

MODEL NO.	DC-S158-1.3
SCHEMATIC	 2
	 3
	 2

SPECIFICATION

- 1.Rating : DC 30V, 3.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles .

3	PIN	1	BRASS	Au-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
1	HOUSING	1	PPA	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

7			
3	更新圖面	Jack	010621
2	新增尺寸	Jack	040918
1	更新料號及更新為A0版	Jack	120716
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	01/06/2
CHECKED BY:	DATE
Jacky Chen	01/06/2
APPROVED BY:	DATE
Tony Kao	01/06/2

DATE _____

01/06/2017

DATE _____

01/06/2017

DATE _____

[illegible]

MATE

FINISH

SCALE

--	--

[illegible][illegible]

100

1 - 1

--	--

--	--

	FILE
--	------

MODLE

DUG NO

--	--

--	--

JACK

DC JACK

DC 9159.1

--	--

SIZE

	A4
	VER