




(Full Stroke)
(A direction ON start position)




CIRCUIT DIAGRAM

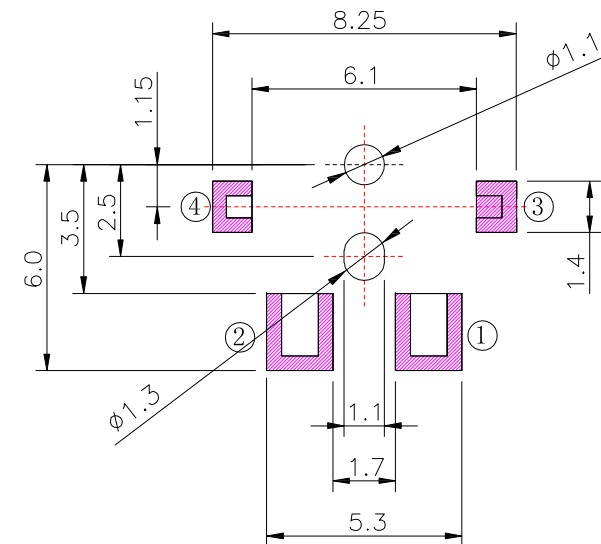

P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 12V, 0.1A.
Contact Resistance	100mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	35±15 gf
Mechanical Life	50,000 cycles

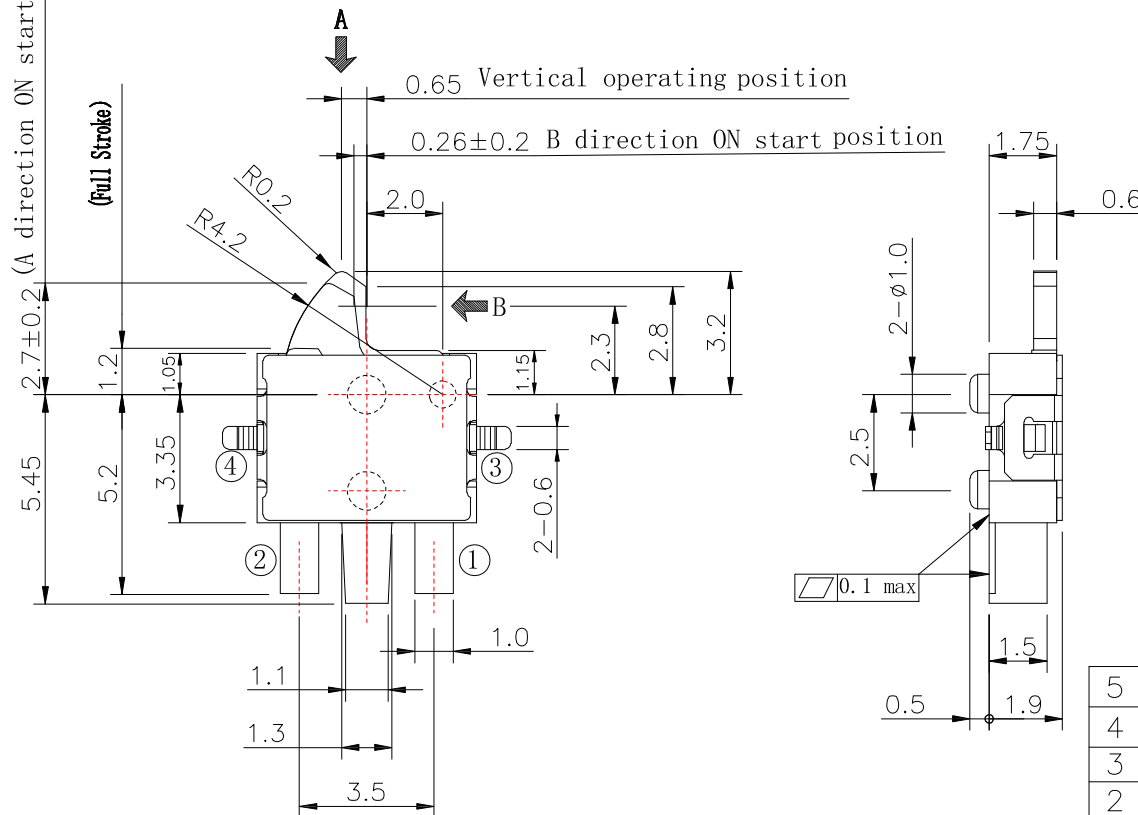

5	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
4	TERMINAL	BRASS	2	Ag PLATED
3	COVER	SUS	1	
2	BASE	PA66	1	BLACK
1	KNOB	PA66	1	BLACK
NO	NAME	MATERIAL	QTY	FINISHING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
05/13/24
DATE
05/13/24
DATE
05/13/24

MATL		TITLE	SWITCH
FINISH		MODLE	DETECTOR SWITCH
SCALE	1 : 1	DWG NO.	DS-A50-GND-S379
SHEET NO.	1 of 1	PART NO.	DS-A50-GND-S379

SIZE
A4
VER
R2