
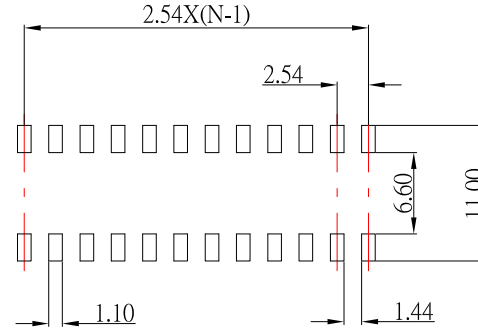
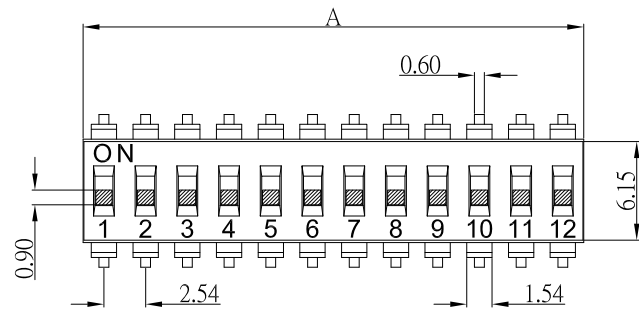



P.C.B LAYOUT MOUNTING PATTERN

SCHEMATIC

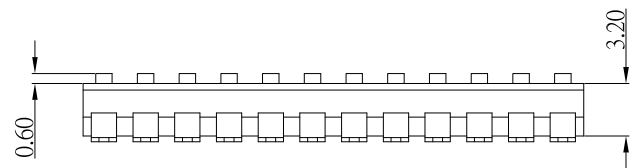


DSICxxLSGEx

PIN數選項(N)

Packing :

R: Reel
T : Tube

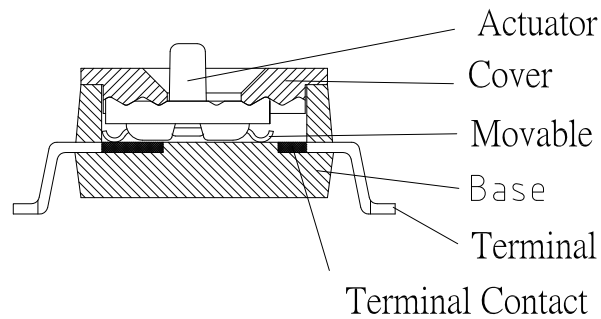

Part Name	Material	Finished
Base	PPS UL94 V0	Black
Cover	PPS UL94 V0	Black
Actuator	PA9T UL94 V0	White
Movable	Phosphor Bronze	Gold
Terminal Contact	Brass	Gold
Terminal	Brass	Gold

Poles(N)	A (mm)
01	2.80
02	5.08
03	7.62
04	10.16
05	12.70
06	15.24
07	17.78
08	20.32
09	22.86
10	25.40
12	30.48



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/15/21
DATE: 12/15/21
DATE: 12/15/21

MATL
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
DIP SWITCH
DSICxxLSGEx
DSICxxLSGEx

SIZE
A4
VER
R3

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新尺寸	Jack	121521
2	更新材質	Jack	091321
1	新增尺寸及公差	Jack	112114