




FH-C11-21xxx-S304

	L1	L2
A	3.40	2.40
B	4.30	2.40

PIN數



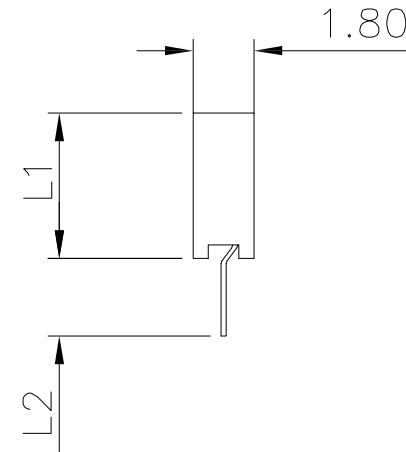


**SPECIFICATIONS:**

1. Current Rating : 1.0 A
2. Insulation Resistance : 1,000MΩ Min
3. Contact Resistance : 20mΩ Max
4. Operation Temperature : -40°C to +105°C

**MATERIALS:**

1. Insulator : LCP ,UL94V-0
2. Contact : Phosphor Bronze
3. Contact Plating : Gold over Nickel

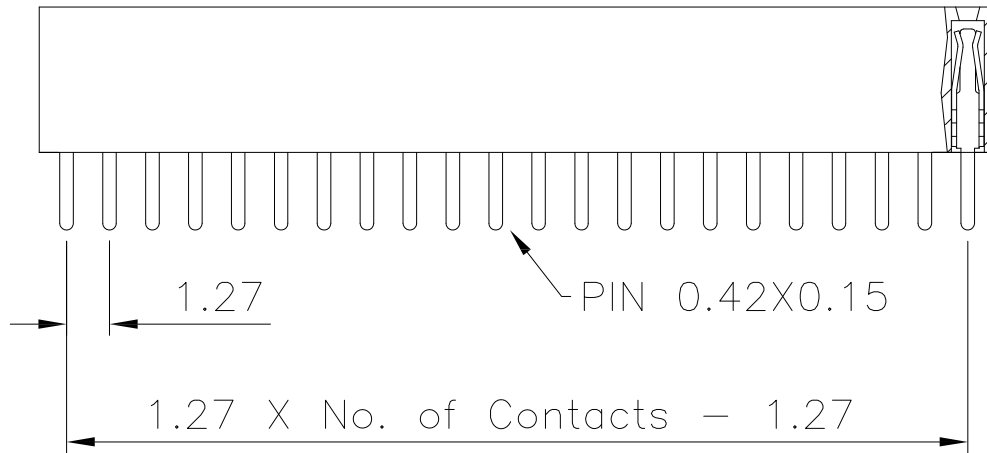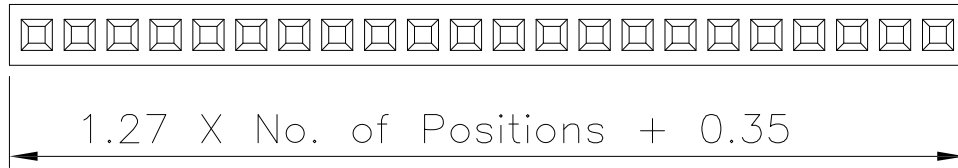

**P. C. B. Layout**

**CONTACT** 建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MAT'L	TITLE	Female Header
Jack Lu	10/03/16			
CHECKED BY:	DATE	FINISH	MODLE	1.27 Female Header DIP
Jacky Chen	10/03/16			
APPROVED BY:	DATE	SCALE	DWG NO.	FH-C11-21xxx-S304
Tony Kao	10/03/16	1 : 1		
		SHEET NO.	PART NO.	FH-C11-21xxx-S304
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE