

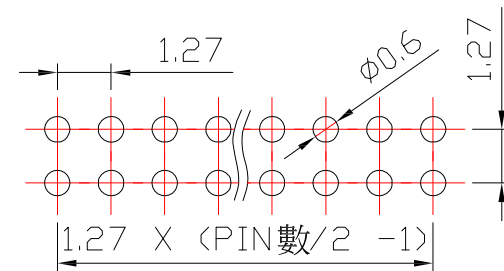
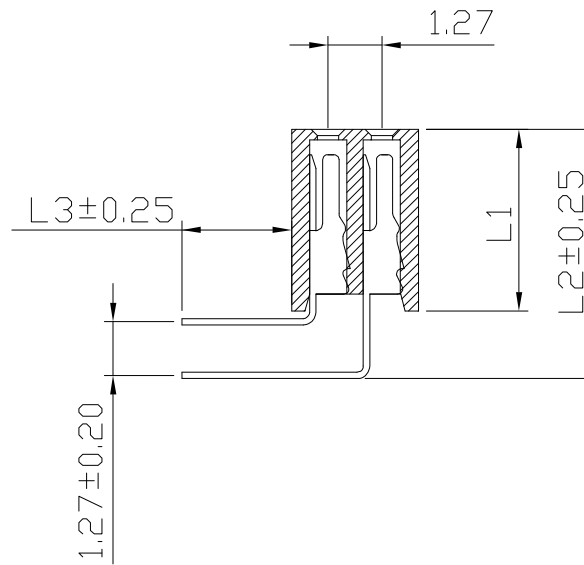


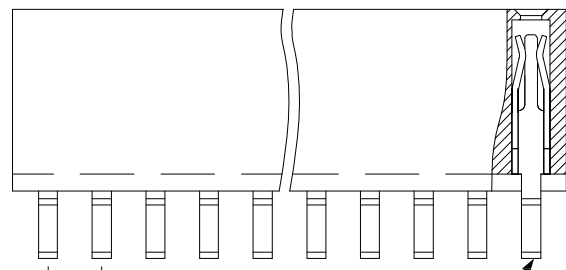

FH-C1A2-32xxx-S304

PIN數

	L1	L2	L3	L4
A	4.30	5.90	2.60	3.00

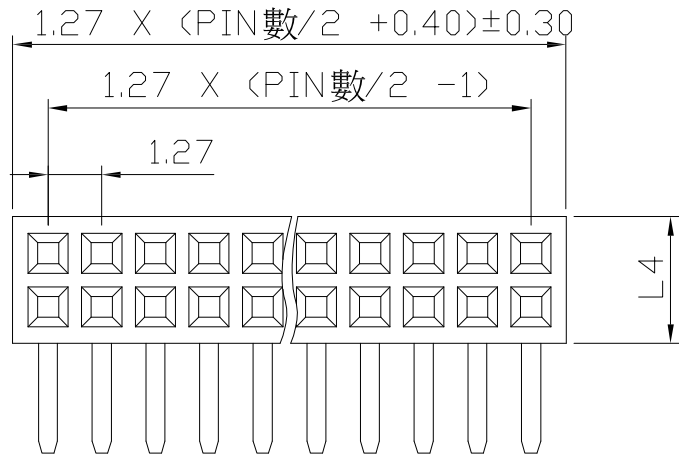

SPECIFICATIONS:

1. Current Rating : 1.0 A
2. Insulation Resistance : 1,000MΩ Min
3. Contact Resistance : 20mΩ Max
4. Operation Temperature : -40°C to +105°C

MATERIALS:

1. Insulator : PA6T
2. Contact : Brass
3. Contact Plating : Gold over Nickel

P. C. B. LaYout

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MATL	TITLE	Female Header
Jack Lu	11/22/21			
CHECKED BY:	DATE	FINISH	MODLE	1.27 Female Header DIP
Jacky Chen	11/22/21			
APPROVED BY:	DATE	SCALE	DWG NO.	FH-C1A2-32xxx-S304
Tony Kao	11/22/21	1 : 1	PART NO.	FH-C1A2-32xxx-S304
		SHEET NO.	1 of 1	

ITEM NO.	DESCRIPTION	DRAWN	DATE