







FH-B31-x2xxxC-S304

Insulator Material:

- 2 : LCP
- 3 : PA6T

PIN數

	L1	L2	L3	L4
A	4.00	4.30	6.20	4.00
B	4.30	4.60	6.00	4.00
C	4.30	4.60	6.20	4.00
D	6.35	6.75	6.40	4.00

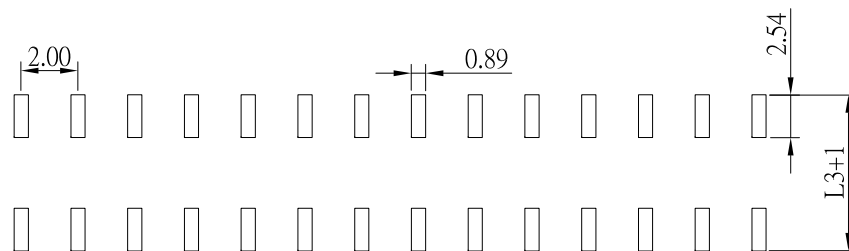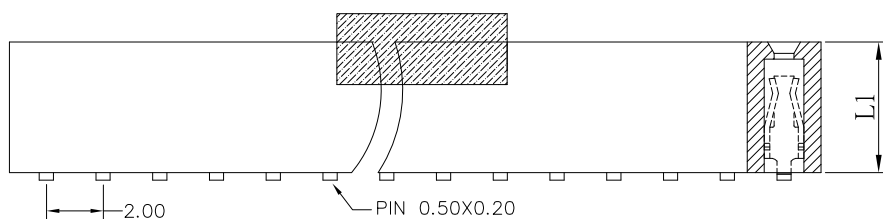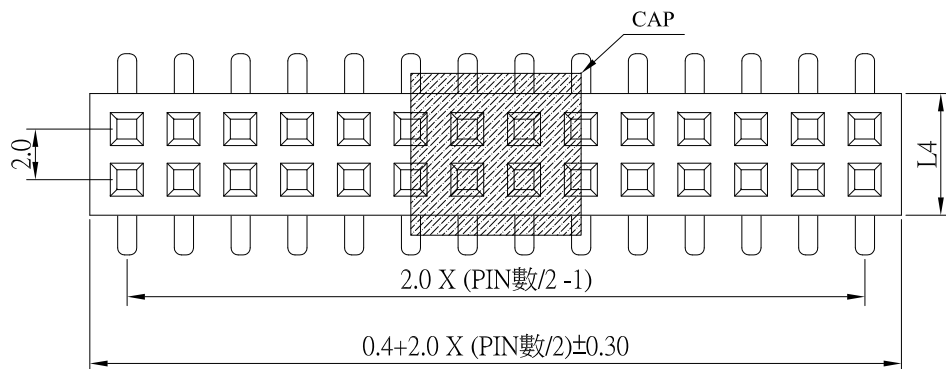

P.C.B. LAYOUT

SPECIFICATIONS:

- 1.Current Rating : 1.5 AMP
- 2.Insulation Resistance : 1000MΩ Min
- 3.Dielectric Withstanding : 500V AC
- 4.Contact Resistance : 20mΩ Max

MATERIALS:

- 1.Contact : Brass
- 2.Insulator : Polyester
- 3.Contact Finish : Gold Plated over Nickel

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	新增尺寸選項	Jack	061521
3	新增尺寸選項	Jack	031920
2	新增尺寸選項	Jack	031320
1	新增材質選項	Jack	102919

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MATL	TITLE	Female Header
Jack Lu	06/16/21			
CHECKED BY:	DATE	FINISH	MODLE	Female Header 加CAP
Jacky Chen	06/16/21			
APPROVED BY:	DATE	SCALE	DWG NO.	FH-B31-x2xxxC-S304
Tony Kao	06/16/21	1 : 1		
		SHEET NO.	PART NO.	FH-B31-x2xxxC-S304
		1 of 1		
				SIZE A4
				VER R4