







FH-A11-x2xxx-S304

Insulator Material: 0 : PBT
3 : PA6T

PIN數

	L1	L2
A	8.5	3.2
B	5.7	3.0
C	8.5	2.8
D	5.0	2.8

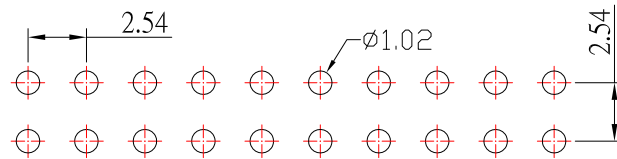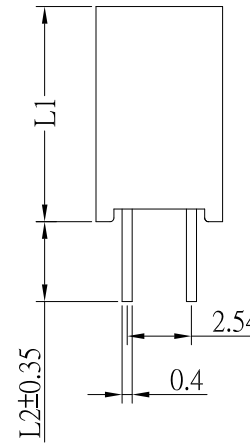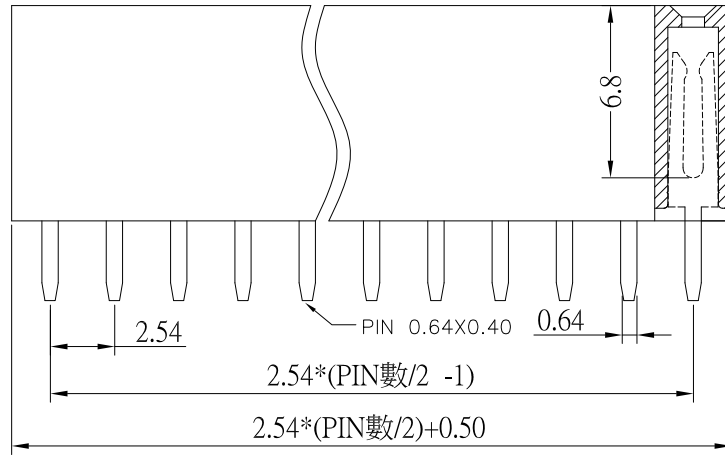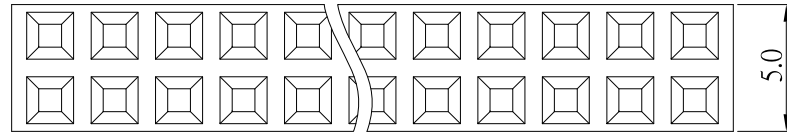

P. C. B. Layout

SPECIFICATIONS:

- 1.Current Rating : 3.0 A
- 2.Insulation Resistance : 1,000MΩ Min
- 3.Contact Resistance : 20mΩ Max
- 4.Operation Temperature : -40°C to +105°C

MATERIALS:

- 1.Insulator : Polyester
- 2.Contact : Phosphor Bronze
- 3.Contact Plating : Gold over Nickel

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新"C"尺寸選項	Jack	080122
3	新增尺寸選項	Jack	052322
2	新增尺寸選項	Jack	070920
1	更新算式標示	Jack	122721

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MATL	TITLE
Jack Lu	08/01/22		Female Header
CHECKED BY:	DATE	FINISH	MODLE
Jacky Chen	08/01/22		2.54 Female Header DIP 2*X PIN數
APPROVED BY:	DATE	SCALE	DWG NO.
Tony Kao	08/01/22	1 : 1	FH-A11-x2xxx-S304
		SHEET NO.	PART NO.
		1 of 1	FH-A11-x2xxx-S304

SIZE
A4
VER
R4