
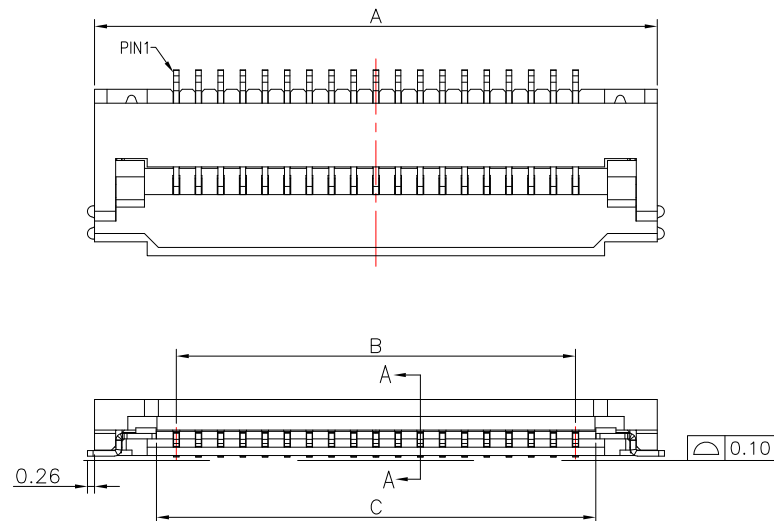
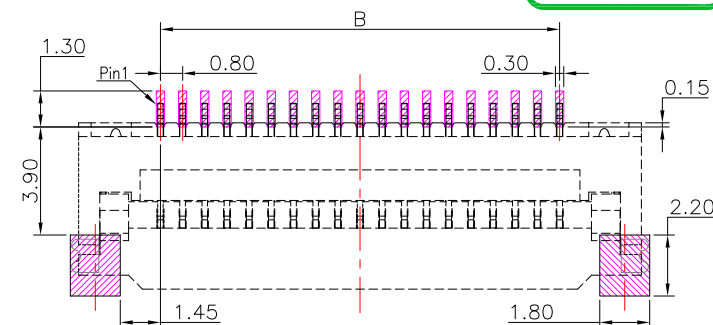


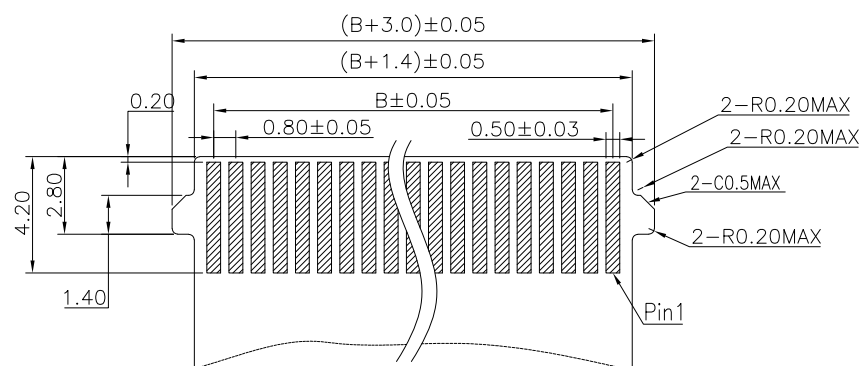


SECTION: A-A

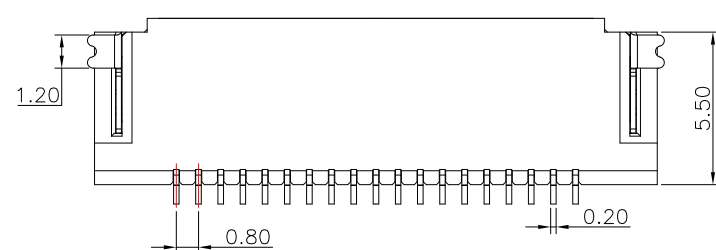

PCB LAYOUT


$$\frac{\text{Recommended FPC/FFC}}{\text{Thickness}} = 0.3 \pm 0.03 \text{ mm}$$

PIN	Dimensions			PIN	Dimensions		
	A	B	C		A	B	C
4	8.30	2.40	3.86	20	21.10	15.20	16.66
5	9.10	3.20	4.66	21	21.90	16.00	17.46
6	9.90	4.00	5.46	22	22.70	16.80	18.26
7	10.70	4.80	6.26	23	23.50	17.60	19.06
8	11.50	5.60	7.06	24	24.30	18.40	19.86
9	12.30	6.40	7.86	25	25.10	19.20	20.66
10	13.10	7.20	8.66	26	25.90	20.00	21.46
11	13.90	8.00	9.46	27	26.70	20.80	22.26
12	14.70	8.80	10.26	28	27.50	21.60	23.06
13	15.50	9.60	11.06	29	28.30	22.40	23.86
14	16.30	10.40	11.86	30	29.10	23.20	24.66
15	17.10	11.20	12.66	31	29.90	24.00	25.46
16	17.90	12.00	13.46	32	30.70	24.80	26.26
17	18.70	12.80	14.26	33	31.50	25.60	27.06
18	19.50	13.60	15.06	34	32.30	26.40	27.86
19	20.30	14.40	15.86				

NOTES:

1. MATERIAL:

- 1.1 HOUSING: LCP,COLOR:NATURE
1.2 AVTUATOR: LCP,COLOR:BLACK
1.3 CONTACT: PHOSPHOR BRONZE
1.4 PEG: BRASS

2. PLATING:

- 2.1 CONTACT: GOLD PLATED ON NICKEL OVERALL
2.2 PEG: TIN PLATED ON NICKEL OVERALL

3. RATING:

- 3.1 CURRENT RATING: 0.5A
3.2 VOLTAGE RATING: 50V AC
3.3 TEMPERATURE RANGE: -40°C~+85°C

ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	11/07/25
CHECKED BY:	DATE
Jacky Chen	11/07/25
APPROVED BY:	DATE
Tony Kao	11/07/25

MAT'L		TITLE	CONNECTOR	
FINISH		MODLE	0.8mm FPC H:2.0mm 前掀蓋	
SCALE	1 : 1	DWG NO.	FPC08L-20xx-B2-S149	SIZE A4
SHEET NO.	1 of 1	PART NO.	FPC08L-20xx-B2-S149	VER R