
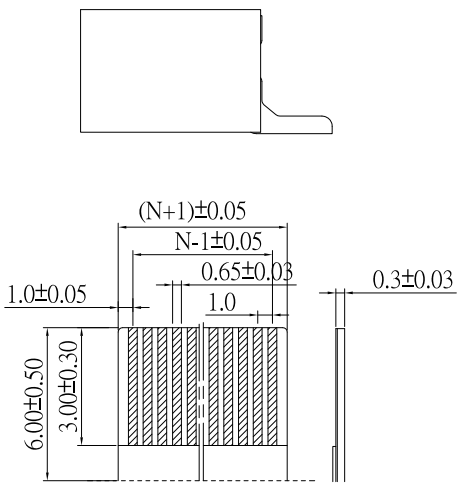


NO. OF contacts	Dimension		
	A	B	C
8	10.50	9.10	7.00
12	14.50	13.10	11.00
18	20.50	19.10	17.00

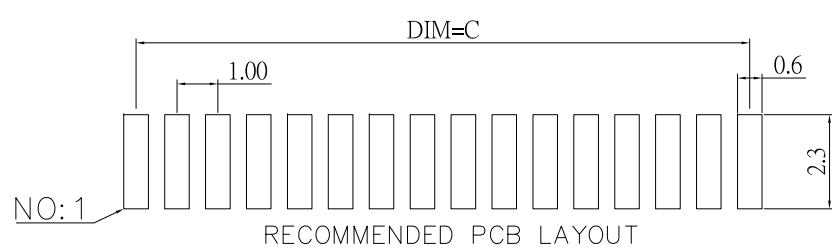

**SPECIFICATIONS**

- Electrical Characteristics:
- 1.1 Rating: 50V ,0.5 A AC / DC
  - 1.2 Temperature range: -40°C~+85°C
  - 1.3 Withstand Voltage: 500V AC
  - 1.4 Contact Resistance: 30mΩ MAX
  - 1.5 Insulation resistance: 500 MΩ MIN
- Material:
- 1.1 Housing: LCP, UL94V-0
  - 1.2 Contact: Phosphor Bronze, Tin Plated over Nickel

ITEM NO.	DESCRIPTION	DRAWN	DATE
6	更新PIN選項	Jack	080420
5	更新樣式	IAN	042319
4	更新PIN選項	Jack	032918
3	新增插入深度尺寸	Jack	081117
2	更新圖面	Jack	082316
1	更新圖面	Jack	061416

**CONTACT** 建倚科技股份有限公司  
**CONTACT TECHNOLOGY CORP.**

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	08/04/20			
CHECKED BY:	DATE	FINISH	MODLE	1.0 FPC 雙接90度 DIP
Jacky Chen	08/04/20			
APPROVED BY:	DATE	SCALE	DWG NO.	FPC10D-28xx-N-S304
Tony Kao	08/04/20	1 : 1		
SHEET NO.	1 of 1	PART NO.	FPC10D-28xx-N-S304	SIZE A4
				VER R6