

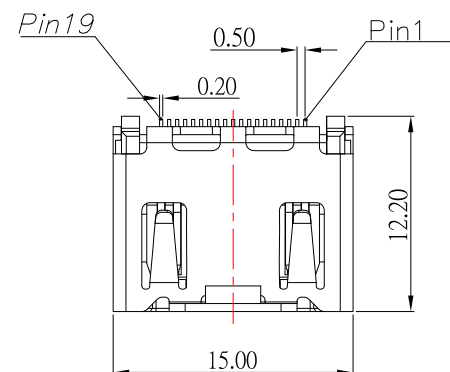
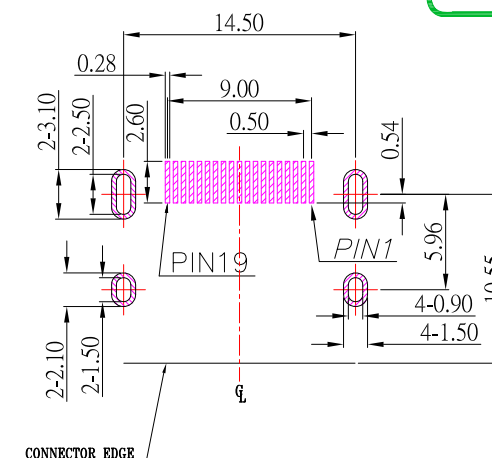
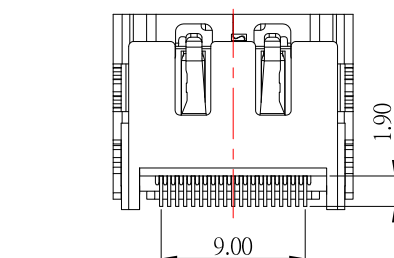


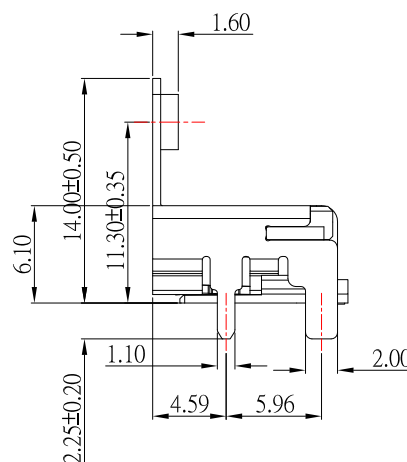

HDMI-19P-SND12x-S297

SHELL PLATED :

Blank	NI
G	GOLD

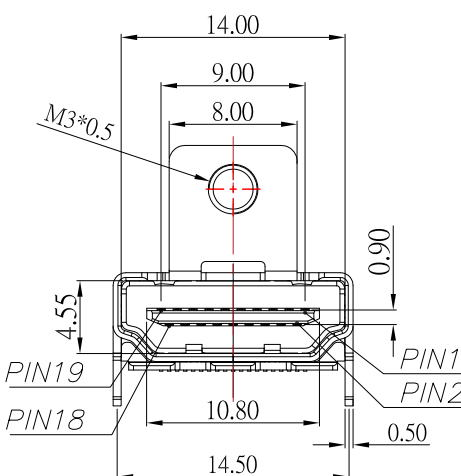

RECOMMENDED P.C.B. LAYOUT

NOTE:

1.MATERIAL:

1.1 HOUSING: LCP,UL94V-0 , BLACK

1.2 CONTACT: BRASS

1.3 SHEEL: BRASS

2.PLATING :

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.ELECTRICAL:

3.1 RATING: 40V , 0.5A

3.2 INSULATION RESISTANCE: 100MΩ MIN

3.3 CONTACT RESISTANCE: 30 mΩ MAX

3.4 WITHSTANDING VOLTAGE: 500V AC / MINUTE

3.5 OPERATING TEMPERATURE: -25°C~ 85°C



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 02/02/23
DATE: 02/02/23
DATE: 02/02/23

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	HDMI AF SMT 單耳無柱,螺絲孔 H11.30mm
SCALE	1 : 1	DWG NO.	HDMI-19P-SND12x-S297
SHEET NO.	1 of 1	PART NO.	HDMI-19P-SND12x-S297

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新MODLE描述	Jack	020223
1	更新圖面	Jack	052020