
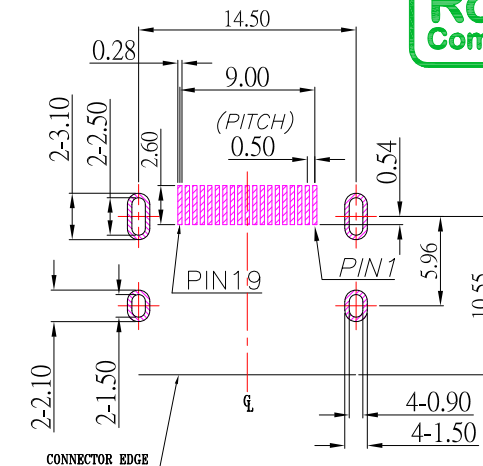
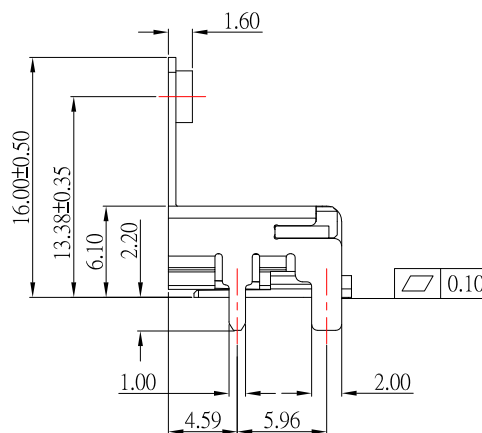

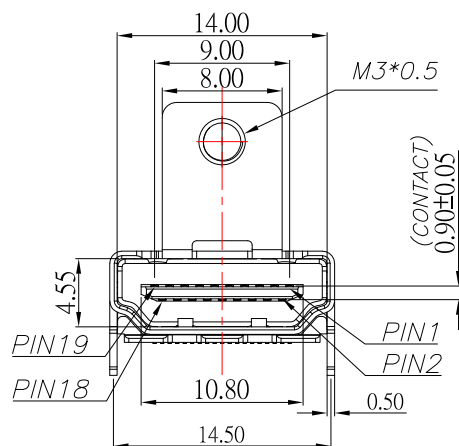


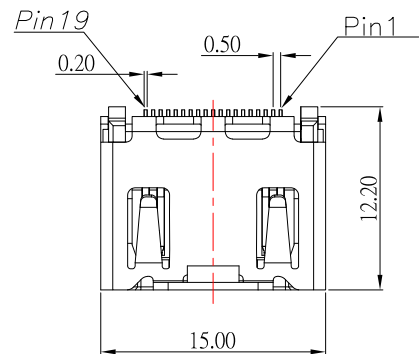

RECOMMENDED PCB LAYOUT (TOP VIEW)

NOTE:

1.MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: BRASS

1.3 SHEEL: BRASS

2.PLATING :

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.ELECTRICAL:

3.1 RATING: 40V , 0.5A

3.2 INSULATION RESISTANCE: 100MΩ MIN

3.3 CONTACT RESISTANCE: 30 mΩ MAX

3.4 WITHSTANDING VOLTAGE: 500V AC / MINUTE

3.5 OPERATING TEMPERATURE: -25°C~ 85°C

**CONTACT** 建倚科技股份有限公司  
**CONTACT TECHNOLOGY CORP.**

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 07/28/25

CHECKED BY: DATE

Jacky Chen 07/28/25

APPROVED BY: DATE

Tony Kao 07/28/25

| MAT'L     | TITLE    | CONNECTOR                     |
|-----------|----------|-------------------------------|
| FINISH    | MODLE    | HDMI AF 刺破式 螺孔H13.38mm 四直腳四彈片 |
| SCALE     | DWG NO.  | HDMI-19P-SND26-S297           |
| SHEET NO. | PART NO. | HDMI-19P-SND26-S297           |
| 1 : 1     |          |                               |
| 1 of 1    |          |                               |