








MRUSB-5B-D11x-S267

SHELL鍍層:

TN
NI



SECTION A-A

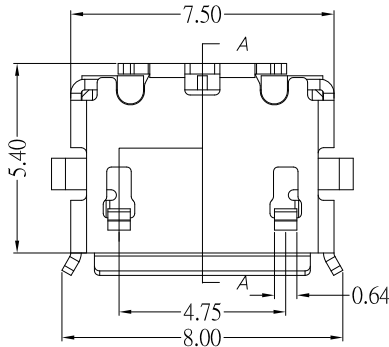

NOTES:

1.MATERIAL:

1.1 HOUSING: LCP,UL94V-0

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: BRASS

2.Finish:

2.1 Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls ;

Nickel under plated overall

2.2 SHELL: NICKEL or TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 CURRENT RATING: PIN1,5--- 1.2 A Max

PIN2,3,4--- 1.0 A Max

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min

3.3 CONTACT RESISTANCE: 30 mΩ MAX.


3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.

3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 LIFE: 10,000 CYCLES

3.8 TEMPERATURE RANGE: -30°C ~ +80°C

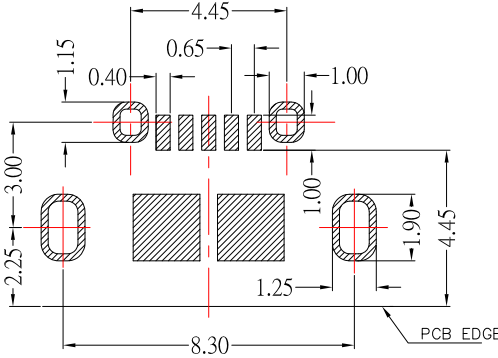

P.C.B LAYOUT MOUNTING PATTERN

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 02/10/15
DATE: 02/10/15
DATE: 02/10/15

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	MICRO USB 5S B TYPE 牛角型
SCALE	DWG NO.	MRUSB-5B-D11x-S267
SHEET NO.	PART NO.	MRUSB-5B-D11x-S267

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新為A0版	Jack	021015