
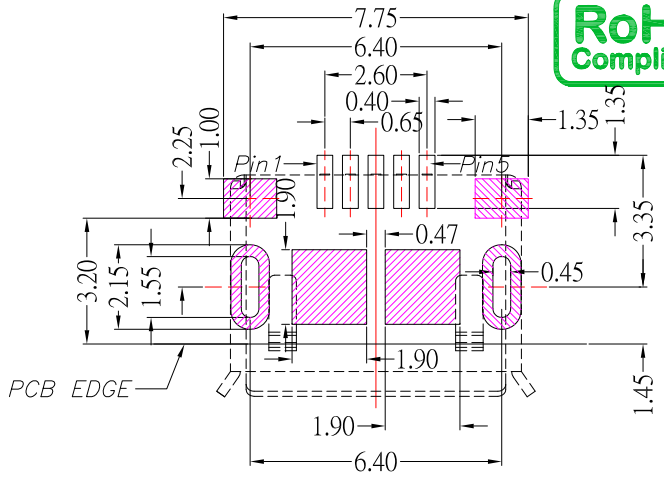
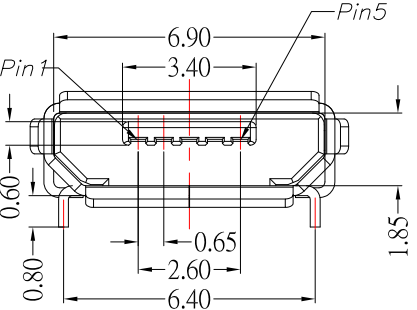

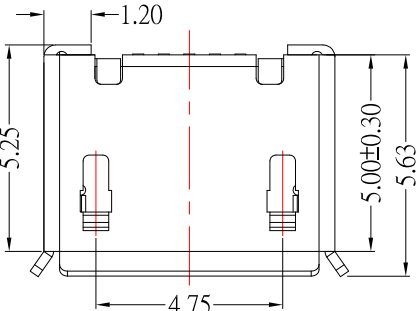




MRUSB-5B-D4x-S347

SHELL 鍍層:

TN
NI

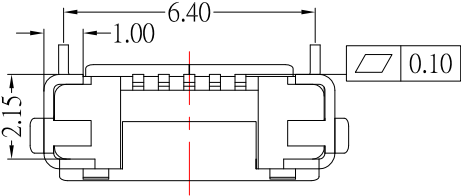

P.C.B LAYOUT MOUNTING PATTERN

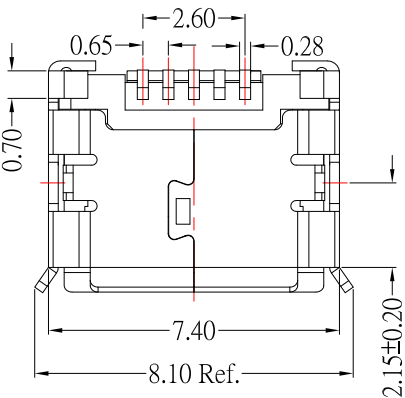

NOTES:
MATERIAL:
1.1 HOUSING: LCP
1.2 CONTACT: PHOSPHOR BRONZE
1.3 SHELL: BRASS
Finish:
2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls
Nickel under plated overall

3.SPECIFICATION:
3.1 CURRENT RATING: PIN(1,5)1.8A MAX ; PIN(2,3,4)1.0 A MAX
3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min
3.3 CONTACT RESISTANCE: 30 mΩ MAX.
3.4 INSULATION RESISTANCE: 100 MΩ MIN.
3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
3.7 TEMPERATURE RANGE: -30°C ~ +80°C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	10/21/20	FINISH	MODLE	MICRO USB 5BF 前插(6.4)後貼無柱
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	10/21/20	1 : 1	MRUSB-5B-D4x-S347	A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	10/21/20	1 of 1	MRUSB-5B-D4x-S347	R2