










MRUSB-5B-D5x-S347

SHELL鍍層:

TN

NI

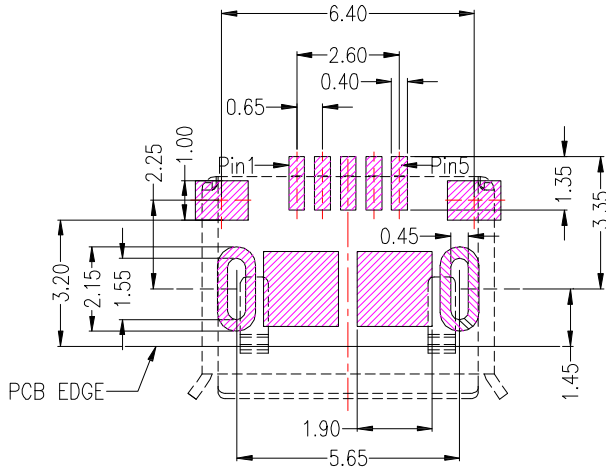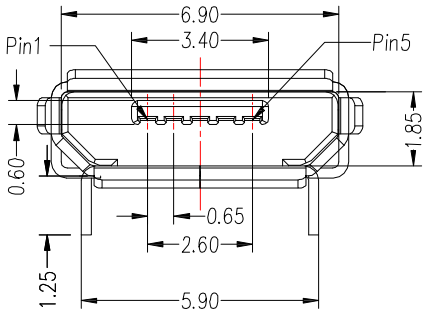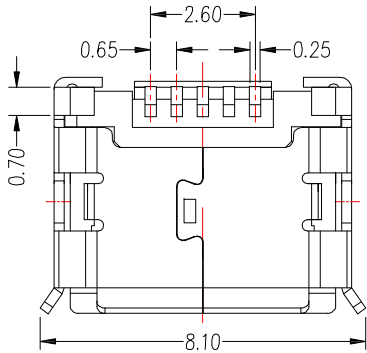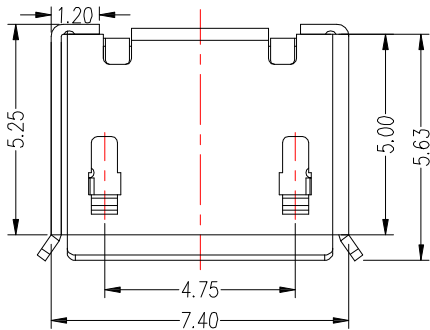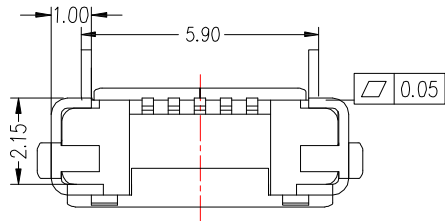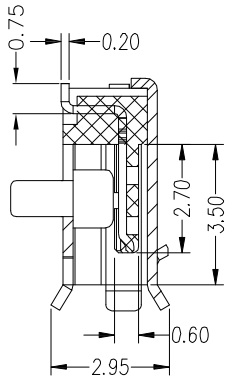

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

1.1 HOUSING: LCP,UL94V-0

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: COPPER ALLOY

Finish:

2.1 Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls

Nickel under plated overall

2.2 Shell: Nickel or Tin under Plated surface layer

3.SPECIFICATION:

3.1 CURRENT RATING: 1.0 A

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min

3.3 CONTACT RESISTANCE: 50 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.

3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 TEMPERATURE RANGE: -30°C ~ +80°C



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 07/08/20
DATE: 07/08/20
DATE: 07/08/20

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
MICRO USB 5BF 前插 (5.65) 後貼無柱
MRUSB-5B-D5x-S347
MRUSB-5B-D5x-S347

SIZE
A4
VER
R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增尺寸	Jack	070820
1	更新底部樣式	Jack	022719