


TN

NI

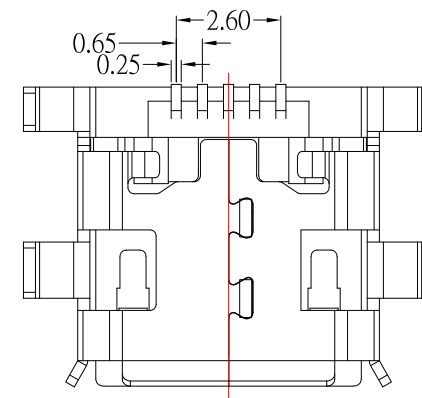

NOTES:

MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: BRASS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL.

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR
TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 RATING: 1-5 PIN:1.8A , 2,3,4 PIN:1.0A

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1 MIN

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.

3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 TEMPERATURE RANGE: -30℃ ~ +80℃

P.C.B LAYOUT MOUNTING PATTERN

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	± 0.3°				

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	11/06/18					
CHECKED BY:	DATE	FINISH		MODLE	MICRO USB 5B/F 沉板 板上H:1.5mm 四腳插	
Jacky Chen	11/06/18	SCALE	1 : 1	DWG NO.	MRUSB-5B-M15Ax-S347	SIZE
APPROVED BY:	DATE					A4
Tony Kao	11/06/18	SHEET NO.	1 of 1	PART NO.	MRUSB-5B-M15Ax-S347	VER
						RY