
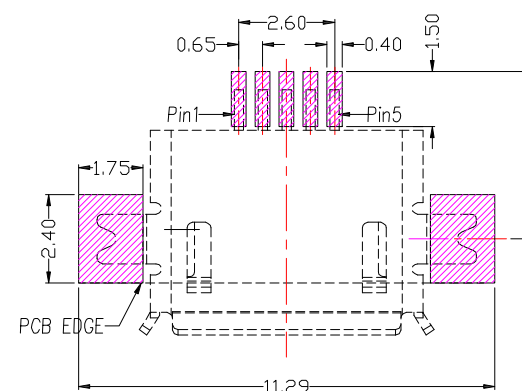
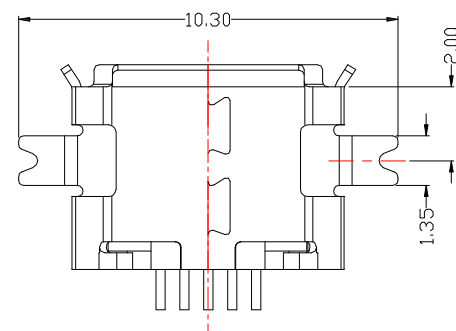

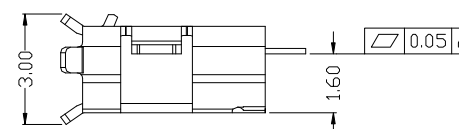
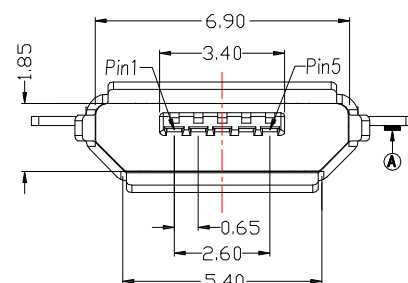
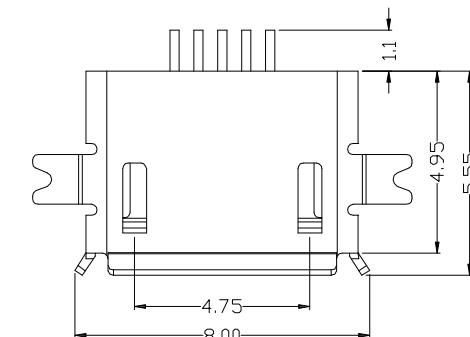


MRUSB-5B-M17x-S347

SHELL鍍層:

TN

NI



P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

1.1 HOUSING: LCP, UL94V-0, Black

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: BRASS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR

TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 RATING: 1.0A

3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 VAC FOR 1 MIN

3.3 CONTACT RESISTANCE: 50 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.

3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 TEMPERATURE RANGE: -30°C ~ +80°C

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

08/01/19

CHECKED BY:

Jacky Chen

DATE

08/01/19

APPROVED BY:

Tony Kao

DATE

08/01/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

MICRO USB 2 腳沉板/板下1.6mm

MRUSB-5B-M17x-S347

MRUSB-5B-M17x-S347

SIZE

A4

VER

R2

ITEM NO.

DESCRIPTION

DRAWN

DATE

Jack

080119

Jack

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417

080119

010417