
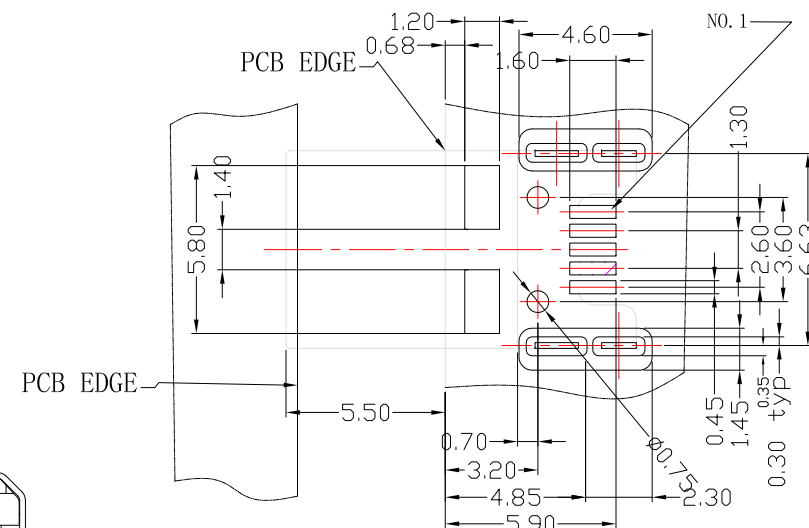


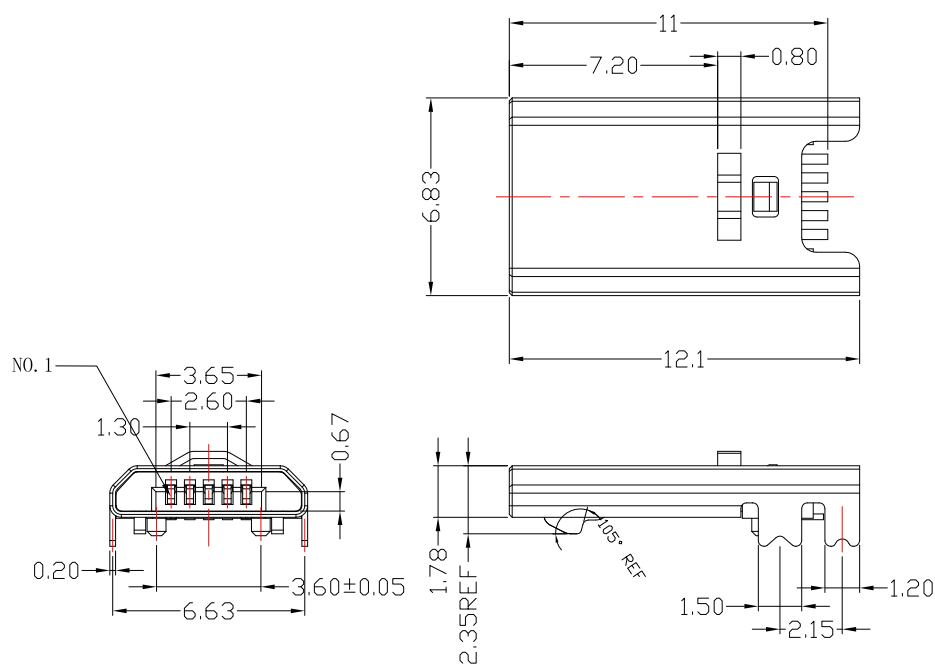

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATION:

1. RATING: 1.0 A , 30VAC
2. DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1min
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 100 MΩ MIN.
5. LIFE: 5,000 CYCLES
6. TEMPERATURE RANGE: -30°C ~ +80°C

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

05/19/17

MAT'L

TITLE

CONNECTOR

CHECKED BY:

Jacky Chen

DATE

05/19/17

FINISH

MODLE

MICRO USB 5 P 公頭貼板反向

APPROVED BY:

Tony Kao

DATE

05/19/17

SHEET NO.

1 of 1

PART NO.

MRUSB-5PLM5-S235

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE