
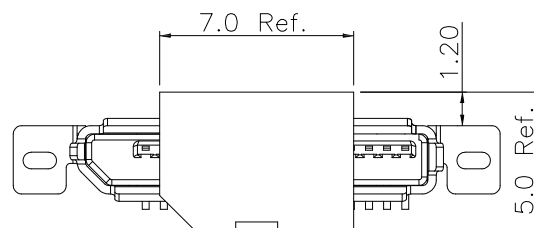
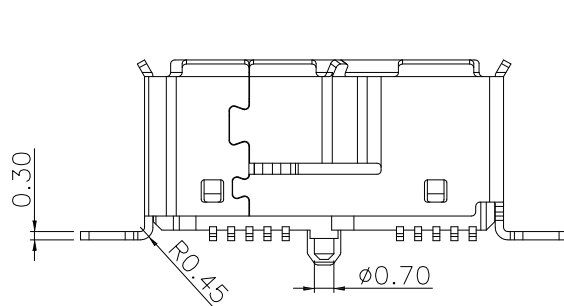
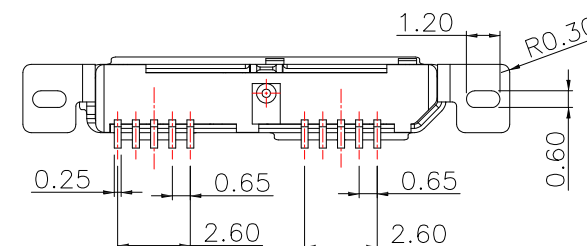

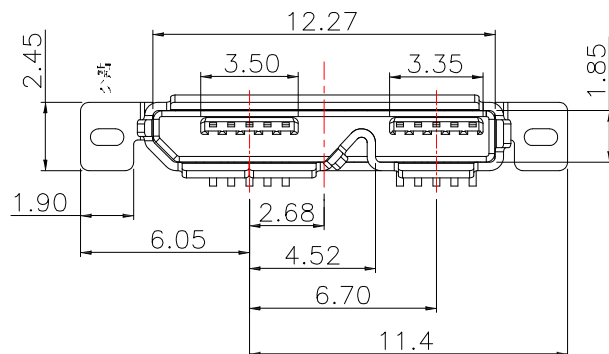
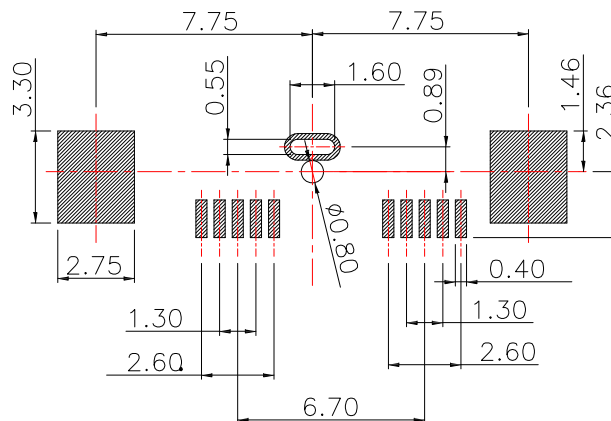


MRUSB-10B30xVSE-S242

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

P.C.B LAYOUT MOUNTING PATTERN

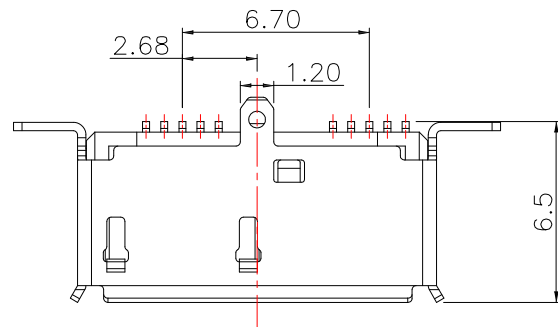

4	CAP	1	LCP	UL94V-0; COLOR:BLACK
3	SHELL	1	SUS304	Nickel under Plated surface layer
2	CONTACT	10	BRASS	Plated Gold in Mating Area ; Tin Plated on Solder Balls ; Nickel under plated overall
1	HOUSING	1	LCP	UL94V-0; COLOR:BLACK
NO	TITLF	O'TY	MATFRIAL	RFMARK

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 03/03/14
DATE: 03/03/14
DATE: 03/03/14

MAT'L
FINISH
SCALE
SHEET NO.

TITLE: CONNECTOR
MODLE: MICRO 3.0 B TYPE 直立式 有柱
DWG NO.: MRUSB-10B30xVSE-S242
PART NO.: MRUSB-10B30xVSE-S242

SIZE: A4
VER: R